

Rain shower for surface-mounted ceiling installation with light 300 mm - Champagne (22kt Gold)

TARA














28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- Distance to ceiling from bottom edge of shower 40 mm
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.


includes light bulbs with a Class F energy efficiency

	Champagne (22kt Gold)	28 032 970-47
	Chrome	28 032 970-00
	Brushed Platinum	28 032 970-06
	Platinum	28 032 970-08
	Dark Chrome	28 032 970-19
	Light Gold	28 032 970-26
	Brushed Light Gold	28 032 970-27
	Brushed Durabronze (23kt Gold)	28 032 970-28
	Matte Black	28 032 970-33
	Brushed Bronze	28 032 970-42
	Brushed Champagne (22kt Gold)	28 032 970-46
	Brushed Chrome	28 032 970-93
	Brushed Dark Platinum	28 032 970-99

Rain shower for surface-mounted ceiling installation with light 300 mm - Champagne (22kt Gold)

TARA

28 032 970
mm [inches]

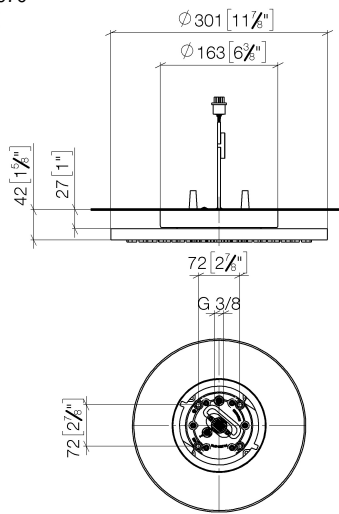

Flow rate chart



Certificates


LGA_38400.

Rain shower for surface-mounted ceiling installation with light 300 mm - Champagne (22kt Gold)

TARA

28 032 970

Parts for other
finishes can be found
here: [Chrome](#)

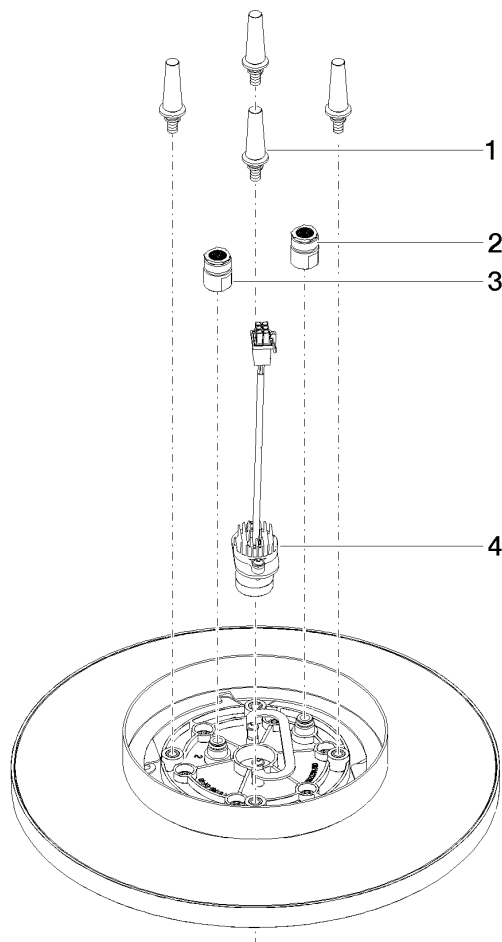

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2