

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical dimensions:

- min. recess depth 137 mm

Ceiling module power supply

- 12V DC (CV)

electrical:

Ambient lighting

Spot lighting

- LED coloured light RGBW
- LED coloured light RGBW

Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway
- Bulbs protected against splashing water

Environment

Planning tips:

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

| | | |
|---|--------------------------------|---------------|
|  | Brushed Light Gold | 28 034 970-27 |
|  | Chrome | 28 034 970-00 |
|  | Brushed Platinum | 28 034 970-06 |
|  | Platinum | 28 034 970-08 |
|  | Dark Chrome | 28 034 970-19 |
|  | Light Gold | 28 034 970-26 |
|  | Brushed Durabronze (23kt Gold) | 28 034 970-28 |
|  | Matte Black | 28 034 970-33 |
|  | Brushed Bronze | 28 034 970-42 |
|  | Brushed Champagne (22kt Gold) | 28 034 970-46 |
|  | Champagne (22kt Gold) | 28 034 970-47 |
|  | Brushed Chrome | 28 034 970-93 |
|  | Brushed Dark Platinum | 28 034 970-99 |

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation with light - 35 034 970 90


- concealed rough parts
- flush-mounted reflection box Ø 360 mm RAL 9003 signal white
- recess depth 137mm
- 2x female thread " outlet
- Input 100-240V AC 50-60Hz
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022
mm [inches]

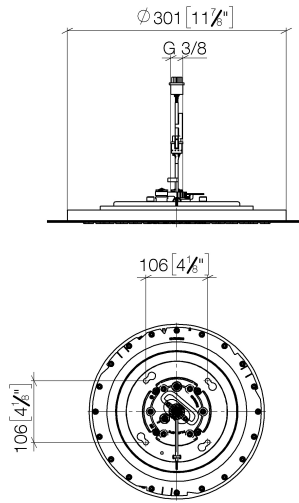

Flow rate chart

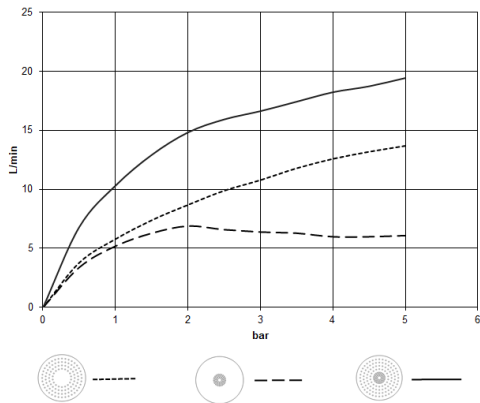

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold SERIES SPECIFIC

28 034 970 Product version from 5/1/2022

Certificates and sustainability

LGA_38


WRAS_240502

Rain shower for recessed ceiling installation with light 300 mm - Brushed Light Gold

SERIES SPECIFIC

28 034 970

Product version from 5/1/2022

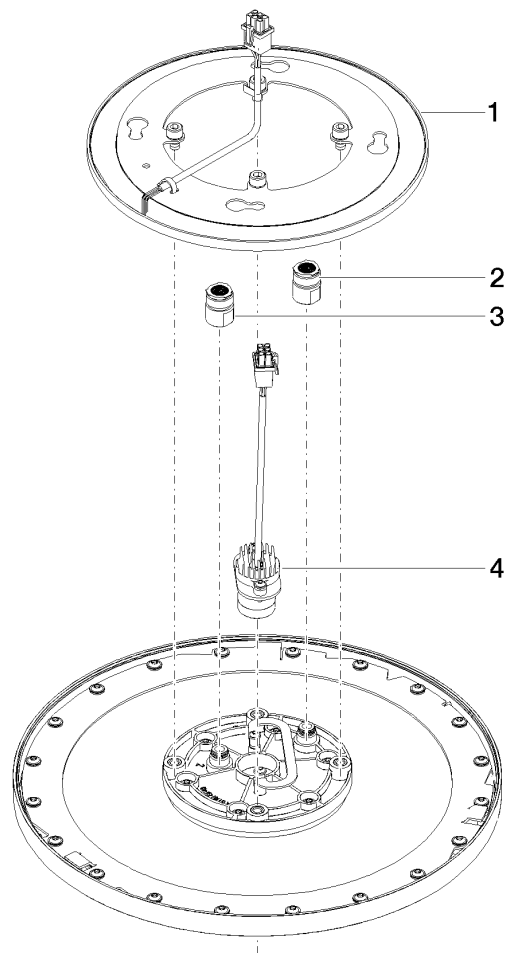

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 1 | 90 10 01 221 00 90 | electronic accessories | 1.00 | 2 |
| 4 | 90 10 01 225 00 90 | electronic accessories | 1.00 | 2 |
| 2 | 90 24 03 309 01 90 | connection | 1.00 | 2 |
| 3 | 90 24 03 309 00 90 | connection | 1.00 | 2 |