

**Rain shower for recessed ceiling installation with light 300 x 240 mm - Chrome**    **SERIES SPECIFIC**

28 044 980    Product version from 5/1/2022



- rain shower 300 x 240mm
  - PURE RAIN, max. flow rate 12 l/min (at 3 bar)
  - PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
  - min. recess depth 137 mm
  - with anti-scale system
- Ceiling module power supply**
- 12V DC (CV)
- Spot lighting**
- LED coloured light RGBW
  - Bulbs protected against splashing water
- Ambient lighting**
- LED coloured light RGBW
  - Bulbs protected against splashing water
- Activation**
- ZigBee Light Link RGBW controller
  - Provided by customer: Zigbee gateway
- Environment**
- Not suitable for outdoor use.
  - Not suitable for use in a steam room.
  - Not suitable for use in chlorinated or salty environments.
  - Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
  - Dornbracht recommends consulting a systems integrator.
  - WRAS
- includes light bulbs with a Class G energy efficiency**
- includes light bulbs with a Class G energy efficiency

	Chrome	28 044 980-00
	Brushed Platinum	28 044 980-06
	Platinum	28 044 980-08
	Dark Chrome	28 044 980-19
	Brushed Light Gold	28 044 980-27
	Brushed Durabrass (23kt Gold)	28 044 980-28
	Matte Black	28 044 980-33
	Brushed Champagne (22kt Gold)	28 044 980-46
	Champagne (22kt Gold)	28 044 980-47
	Brushed Chrome	28 044 980-93
	Brushed Dark Platinum	28 044 980-99


**Required miscellaneous**




- Concealed ceiling installation box 35 044 970 90 for recessed ceiling installation with light -**
- flush-mounted installation box 360x 300 mm RAL 9003 signal white
  - recess depth 137mm
  - Input 100-240V AC 50-60Hz
  - concealed rough parts
  - Output 12V DC SELV / Class 2
  - ZigBee Light Link RGBW controller

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Chrome SERIES SPECIFIC

28 044 980 Product version from 5/1/2022

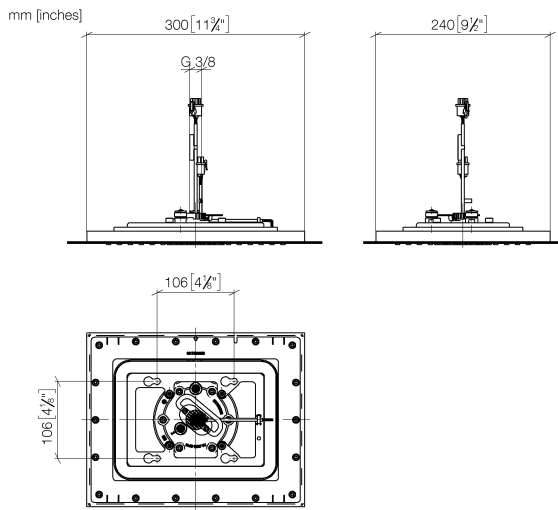

### Flow rate chart

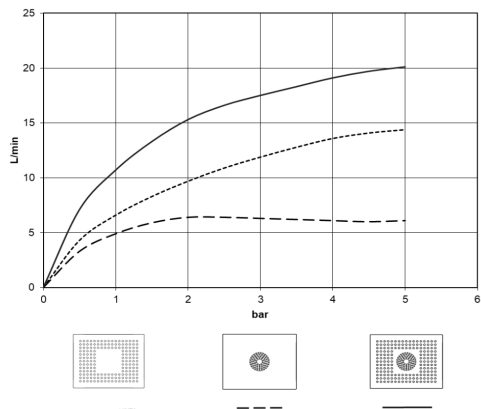

### Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



## Rain shower for recessed ceiling installation with light 300 x 240 mm - Chrome SERIES SPECIFIC

---

28 044 980 Product version from 5/1/2022

### Certificates and sustainability


---

LGA\_38

WRAS\_240502

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Chrome SERIES SPECIFIC

28 044 980 Product version from 5/1/2022

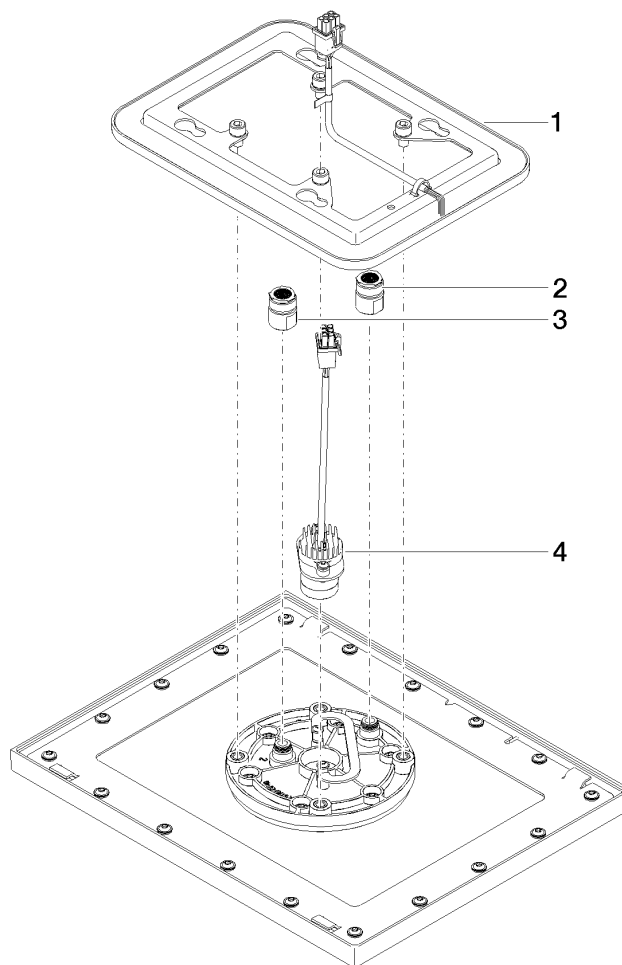

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
4	90 10 01 225 00 90	electronic accessories	1.00	2
1	90 10 01 224 00 90	electronic accessories	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
2	90 24 03 309 01 90	connection	1.00	2