

## Rain shower with wall fixing FlowReduce 220 mm - Cyprum

SERIES SPECIFIC

28 647 970


















- rain shower Ø 220 mm
- Rain shower material: metal
- PURE RAIN, max. flow rate 14 l/min (at 3 bar)
- Function from: 7 l/min
- quick clearing
- with anti-scale system

### Technical data:

- 450mm projection
- rosette Ø 60 mm
- 1/2" connection

### Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Cyprum	28 647 970-49
	Chrome	28 647 970-00
	Brushed Platinum	28 647 970-06
	Platinum	28 647 970-08
	Dark Chrome	28 647 970-19
	Light Gold	28 647 970-26
	Brushed Light Gold	28 647 970-27
	Brushed Durabrass (23kt Gold)	28 647 970-28
	Matte Black	28 647 970-33
	Brushed Dark Brass	28 647 970-39
	Brushed Bronze	28 647 970-42
	Brushed Champagne (22kt Gold)	28 647 970-46
	Champagne (22kt Gold)	28 647 970-47
	Brushed Chrome	28 647 970-93
	Brushed Dark Platinum	28 647 970-99

## Required miscellaneous

Concealed wall elbow -

35 085 970 90




28 647 970

mm [inches]



Flow rate chart

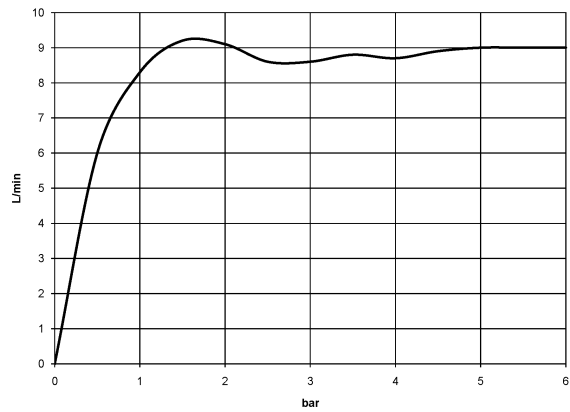

28 647 970

