

## Rain shower with ceiling fixing FlowReduce 400 mm - Light Gold

SERIES SPECIFIC

28 698 970













- rain shower Ø 400 mm
- rain flow
- max. flow 12 l/min
- Function from: 12 l/min
- quick clearing
- with anti-scale system

### Technical data:

- rosette Ø 60 mm optional
- 1/2" connection


### Notes:

- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Light Gold	28 698 970-26
	Chrome	28 698 970-00
	Brushed Platinum	28 698 970-06
	Platinum	28 698 970-08
	Dark Chrome	28 698 970-19
	Brushed Light Gold	28 698 970-27
	Brushed Durabronze (23kt Gold)	28 698 970-28
	Matte Black	28 698 970-33
	Brushed Dark Brass	28 698 970-39
	Brushed Bronze	28 698 970-42
	Brushed Champagne (22kt Gold)	28 698 970-46
	Champagne (22kt Gold)	28 698 970-47
	Brushed Chrome	28 698 970-93
	Brushed Dark Platinum	28 698 970-99

28 698 970

mm [inches]

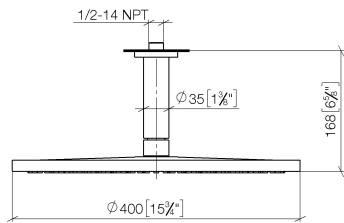

Flow rate chart

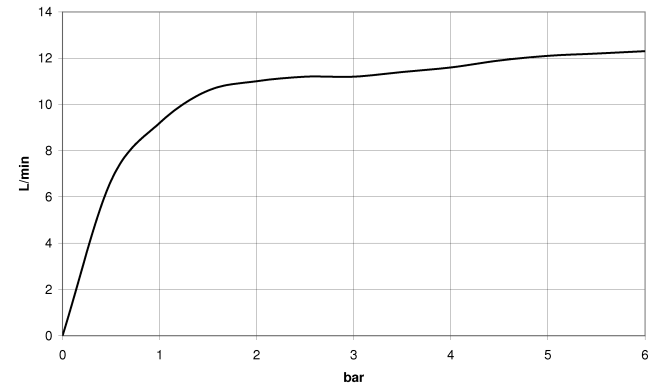

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen



## Rain shower with ceiling fixing FlowReduce 400 mm - Light Gold

---

SERIES SPECIFIC

28 698 970

Certificates and sustainability

---

LGA\_38

28 698 970

Parts for other  
finishes can be found  
here: [Chrome](#)

