

Concealed thermostat with built-in isolators -

SERIES-VARIOUS

35 428 970 90    Product version from 3/13/2017



- pre-seal
- lead-free, dezincification resistant
- 2x back flow preventer
- 3x outlet G 1/2"
- 2x female thread 1/2" connections
- dust cover
- anti-water packing
- sound and thermal insulation
- gauge 70 mm
- suitable for xGRID (when using installation track + 12 mm recess depth)
- WRAS

Can only be combined with exposed trim parts 36 427 SSS-FF

Recommended miscellaneous



**Drybox Concealed thermostat -**  
 •Overflow is part of the scope of delivery.

39 426 970 90

Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -**

12 340 970 90

Required miscellaneous



**xGRID Installation track 555 mm -**


12 360 970 90

**Concealed thermostat with built-in isolators -**

**SERIES-VARIOUS**

35 428 970 90 Product version from 3/13/2017

mm [inches]

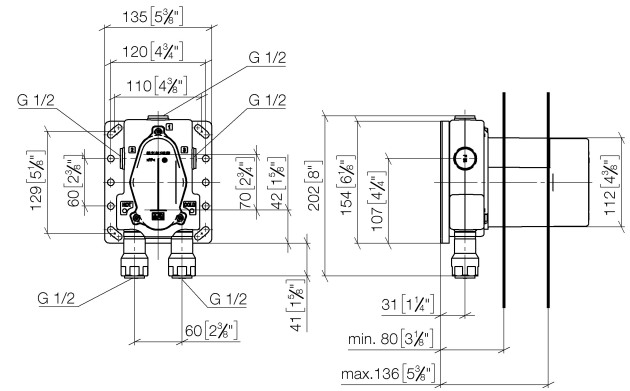


**Codes & Standards**

EN 1111	EN 1717	Scottish Water Byelaws	UK Water Supply Regulations
---------	---------	---------------------------	--------------------------------

**Certificates and sustainability**

Belgaqua_22_279_2	DVGW_DW- 6512DN0	WRAS_250402
-------------------	---------------------	-------------

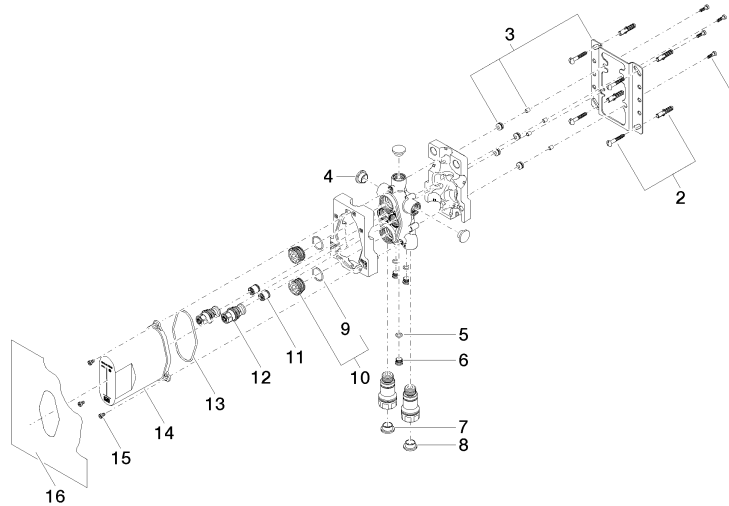

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
7	09 31 20 093 90	plug	1.00	2
1	09 30 30 171 90	screw	4.00	2
2	04 30 31 024 01 90	fixing set	2.00	2
8	09 31 20 094 90	plug	1.00	2
3	04 17 20 127 00 90	holder	1.00	2
11	90 23 01 040 00 90	back-flow preventer	2.00	2
4	09 31 20 092 90	plug	4.00	2
9	09 14 10 112 90	seal	2.00	2
14	04 21 02 146 00 90	cap	1.00	2
16	04 14 03 080 00 90	gasket kit	1.00	2
10	04 30 11 149 00 90	plug	2.00	2
13	09 14 10 512 90	seal	1.00	2
12	04 29 05 031 01 90	insert	2.00	2
15	09 30 30 112 90	screw	3.00	2
5	09 14 10 139 90	seal	3.00	2
6	04 31 20 039 11 90	plug	3.00	2