






SERIES-VARIOUS AQUAHALO Concealed ceiling installation box - Chrome

SERIES-VARIOUS

35 750 970 Product version from 4/1/2024



- concealed rough parts
- Rain panel with 3 different flow modes
- AQUACIRCLE RAIN: Circular rain curtain, max. flow rate 14 l/min (at 3 bar)
- TEMPEST RAIN: Natural rain, max. flow rate 9 l/min (at 3 bar)
- DIAMOND RAIN: Ring of rain, max. flow rate 6.8 l/min (at 3 bar)
- Ceiling installation enclosure 605 x 605 x 95 mm
- Weight: 10 kg
- min. recess depth 110 mm
- max. recess depth 150 mm
- For simultaneous control of the jet types, we recommend the xTool thermostat module

| | | |
|---|-------------------------------|---------------|
|  | Chrome | 35 750 970-00 |
|  | Brushed Platinum | 35 750 970-06 |
|  | Matte Black | 35 750 970-33 |
|  | Brushed Champagne (22kt Gold) | 35 750 970-46 |
|  | Champagne (22kt Gold) | 35 750 970-47 |

Separate LED power supply

Input LED power supply

- Input 100-240V AC 50-60Hz

Output LED power supply

- 350mA (CC)

Output specification LED power supply

- SELV (Safety Extra Low Voltage)
- Class 2

Ceiling module power supply

- 350mA (CC)
- Supply pipe 7 m

Spot lighting

- LED colour temperature approx. 3000 K
- Bulbs protected against splashing water
- Contains energy efficiency class bulbs
- Technology: LED, not dimmable
- Provided by customer: Light switch

Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

Pre-assembly kit for three-way diverter included

Recommended miscellaneous

Leak protection 1/2" -

- This article is needed 3x.

12 010 970 90




Required miscellaneous

**SERIES-VARIOUS AQUAHALO
Rain panel - Chrome**

41 750 979-00



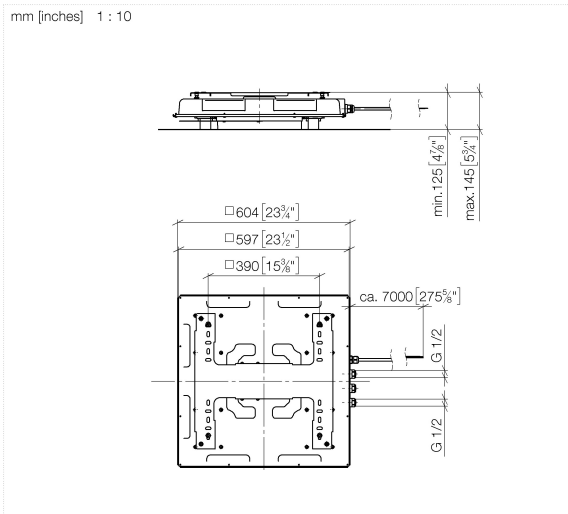


Codes & Standards

| | | | |
|----------|----------|---------------------------|--------------------------------|
| DIN 4109 | ISO 3822 | Scottish Water Byelaws | UK Water Supply Regulations |
|----------|----------|---------------------------|--------------------------------|

Ü-Zeichen

Certificates and sustainability

LGA_38 WRAS_250302

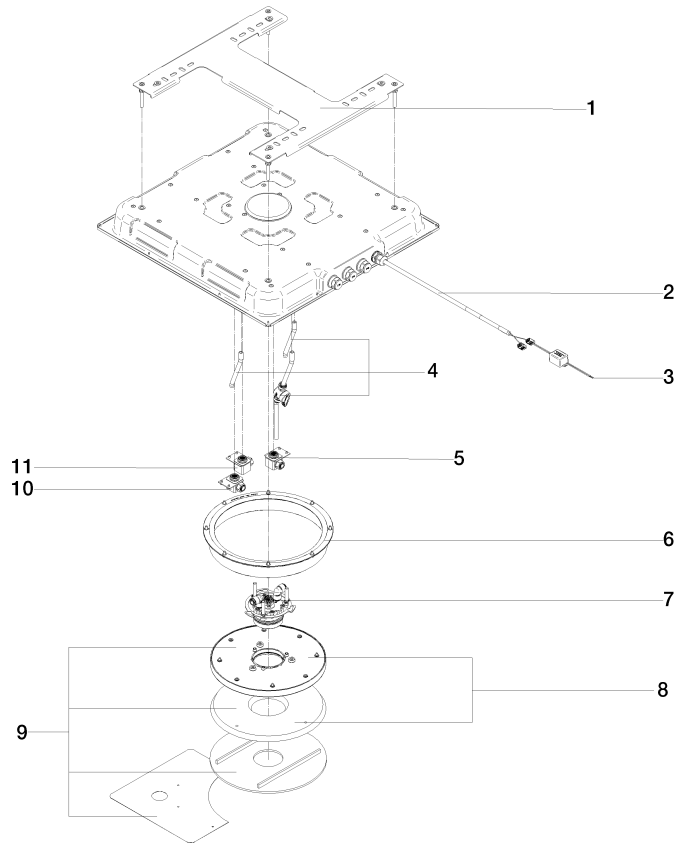

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|---------------------------|---------------|---------------|
| 11 | 90 24 04 605 01 90 | cartridge | 1.00 | 2 |
| 8 | 90 31 20 071 00 90 | rosette | 1.00 | 2 |
| 4 | 90 24 04 389 00 90 | Flushing service kit | 1.00 | 2 |
| 6 | 90 21 02 439 00 90 | Repair kit | 1.00 | 2 |
| 3 | 90 10 01 257 00 90 | electronic accessories | 1.00 | 2 |
| 5 | 90 24 04 605 02 90 | cartridge | 1.00 | 2 |
| 2 | 90 10 01 227 00 90 | electronic accessories | 1.00 | 2 |
| 10 | 90 24 04 605 03 90 | cartridge | 1.00 | 2 |
| 9 | 90 91 42 097 00 90 | Installation kit | 1.00 | 30 |
| 1 | 90 17 20 287 02 90 | flange | 1.00 | 2 |
| 7 | 90 17 09 062 16-00 | Spray module Diamond Rain | 1.00 | 10 |