

Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Brushed Light Gold	36 427 670-27
	Chrome	36 427 670-00
	Brushed Platinum	36 427 670-06
	Platinum	36 427 670-08
	Dark Chrome	36 427 670-19
	Brushed Durabrass (23kt Gold)	36 427 670-28
	Matte Black	36 427 670-33
	Brushed Champagne (22kt Gold)	36 427 670-46
	Champagne (22kt Gold)	36 427 670-47
	Brushed Chrome	36 427 670-93
	Brushed Dark Platinum	36 427 670-99

Required miscellaneous



- Concealed thermostat -** 35 427 970 90
- min. recess depth 80 mm
 - max. recess depth 136 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous



- Concealed thermostat with built-in isolators -** 35 428 970 90
- min. recess depth 80 mm
 - max. recess depth 136 mm

Required miscellaneous




- xGRID Installation track 555 mm -** 12 360 970 90

Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022

mm [inches]

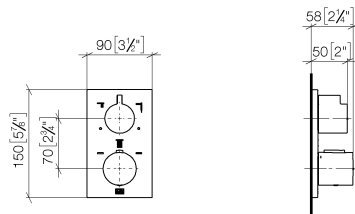

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022

Certificates and sustainability

LGA_29	DVGW_DW- 6512DN0	WRAS_250402
--------	---------------------	-------------

Concealed thermostat with three function volume control - Brushed Light Gold SERIES SPECIFIC

36 427 670 Product version from 6/30/2022

