


LISSÉ Concealed thermostat with three function volume control - Brushed Dark Platinum








LISSÉ

36 427 845


Product version from 6/30/2022



- rotary diverter with volume control and shut-off function
- cover plate 150 x 90 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

	Brushed Dark Platinum	36 427 845-99
	Chrome	36 427 845-00
	Brushed Platinum	36 427 845-06
	Dark Chrome	36 427 845-19
	Brushed Light Gold	36 427 845-27
	Matte Black	36 427 845-33
	Brushed Chrome	36 427 845-93

Required miscellaneous




Concealed thermostat -

•min. recess depth 80 mm

•max. recess depth 136 mm

35 427 970 90


Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous




Concealed thermostat with built-in isolators -

•min. recess depth 80 mm

•max. recess depth 136 mm


35 428 970 90

Required miscellaneous




xGRID Installation track 555 mm -

12 360 970 90

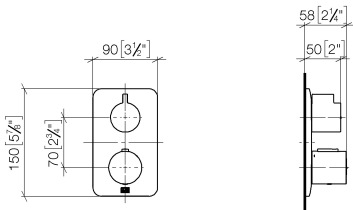

Flow rate chart

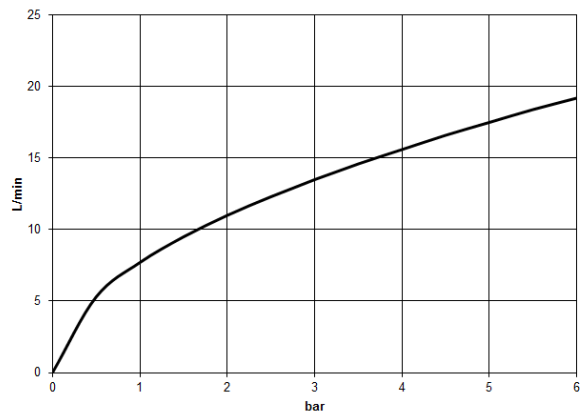

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



LISSE Concealed thermostat with three function volume control - Brushed Dark
Platinum

LISSE

36 427 845 Product version from 6/30/2022

Certificates and sustainability

LGA_29

DVGW_DW-
6512DN0

WRAS_250402

LISSÉ Concealed thermostat with three function volume control - Brushed Dark Platinum

LISSÉ

36 427 845 Product version from 6/30/2022

