

Concealed thermostat with three function volume control - Dark Chrome

SERIES SPECIFIC

36 427 970



- rotary diverter with volume control and shut-off function
- cover plate Ø 150 mm
- temperature control handle with safety limit stop at 38°C
- hot water temperature limiter, can be preset
- WRAS

| | | |
|--|--------------------------------|---------------|
| | Dark Chrome | 36 427 970-19 |
| | Chrome | 36 427 970-00 |
| | Brushed Platinum | 36 427 970-06 |
| | Platinum | 36 427 970-08 |
| | Light Gold | 36 427 970-26 |
| | Brushed Light Gold | 36 427 970-27 |
| | Brushed Durabronze (23kt Gold) | 36 427 970-28 |
| | Matte Black | 36 427 970-33 |
| | Brushed Dark Brass | 36 427 970-39 |
| | Brushed Bronze | 36 427 970-42 |
| | Brushed Champagne (22kt Gold) | 36 427 970-46 |
| | Champagne (22kt Gold) | 36 427 970-47 |
| | Brushed Chrome | 36 427 970-93 |
| | Brushed Dark Platinum | 36 427 970-99 |

Required miscellaneous



- Concealed thermostat -** 35 427 970 90
- max. recess depth 136 mm
 - min. recess depth 80 mm

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

Required miscellaneous



- Concealed thermostat with built-in isolators -** 35 428 970 90
- max. recess depth 136 mm
 - min. recess depth 80 mm


Required miscellaneous




- xGRID Installation track 555 mm -** 12 360 970 90

36 427 970

mm [inches]

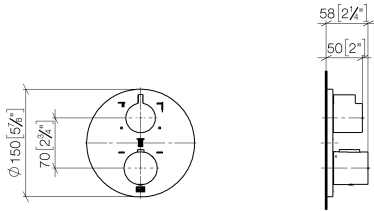

Flow rate chart

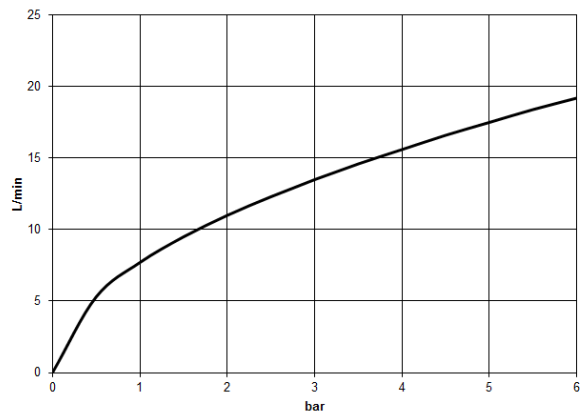

Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Concealed thermostat with three function volume control - Dark Chrome

SERIES SPECIFIC

36 427 970

Certificates and sustainability

| | | |
|--------|---------------------|-------------|
| LGA_29 | DVGW_DW- 6512DN0 | WRAS_250402 |
|--------|---------------------|-------------|

36 427 970

