

xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold

SERIES SPECIFIC

36 501 780

Product version from 9/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 501 780-27
	Chrome	36 501 780-00
	Brushed Platinum	36 501 780-06
	Platinum	36 501 780-08
	Dark Chrome	36 501 780-19
	Brushed Durabronze (23kt Gold)	36 501 780-28
	Matte Black	36 501 780-33
	Brushed Dark Bronze	36 501 780-39
	Brushed Chrome	36 501 780-93
	Brushed Dark Platinum	36 501 780-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control -

35 503 970 90

- min. recess depth 115 mm
- max. recess depth 155 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction -

12 340 970 90

Required miscellaneous




xGRID Installation track 555 mm -

12 360 970 90


xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 780 Product version from 9/1/2022

mm [inches]

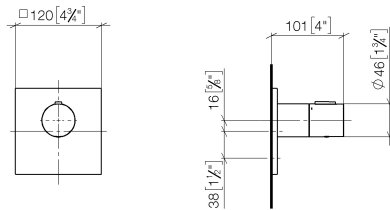

Flow rate chart

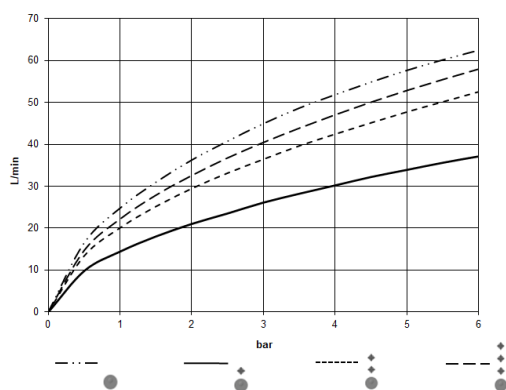

Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 780 Product version from 9/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 780 Product version from 9/1/2022

