

## xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC

36 501 985 Product version from 9/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 501 985-27
	Chrome	36 501 985-00
	Brushed Platinum	36 501 985-06
	Platinum	36 501 985-08
	Dark Chrome	36 501 985-19
	Brushed Durabronze (23kt Gold)	36 501 985-28
	Matte Black	36 501 985-33
	Brushed Champagne (22kt Gold)	36 501 985-46
	Champagne (22kt Gold)	36 501 985-47
	Brushed Chrome	36 501 985-93
	Brushed Dark Platinum	36 501 985-99

### Required miscellaneous



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90

- min. recess depth 95 mm
- max. recess depth 160 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous




**xGRID Installation track 555 mm -** 12 360 970 90


**xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold** SERIES SPECIFIC

36 501 985 Product version from 9/1/2022

mm [inches]

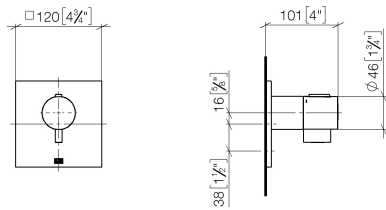

**Flow rate chart**

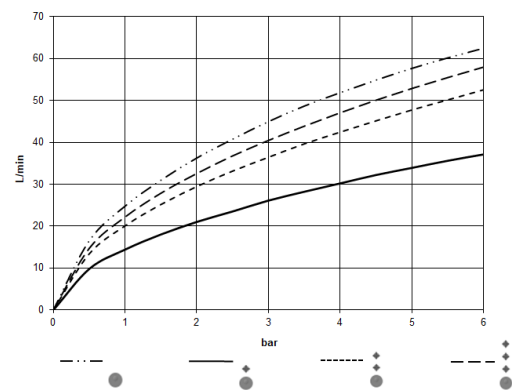

**Codes & Standards**

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold    SERIES SPECIFIC

---

36 501 985    Product version from 9/1/2022

Certificates and sustainability

---

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 1/2" - Brushed Light Gold SERIES SPECIFIC**

36 501 985 Product version from 9/1/2022

