

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 979 Product version from 9/1/2022



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 503 979-27
	Chrome	36 503 979-00
	Brushed Platinum	36 503 979-06
	Platinum	36 503 979-08
	Durabrand (23kt Gold)	36 503 979-09
	Dark Chrome	36 503 979-19
	Light Gold	36 503 979-26
	Brushed Durabrand (23kt Gold)	36 503 979-28
	Matte Black	36 503 979-33
	Brushed Bronze	36 503 979-42
	Brushed Champagne (22kt Gold)	36 503 979-46
	Champagne (22kt Gold)	36 503 979-47
	Brushed Chrome	36 503 979-93
	Brushed Dark Platinum	36 503 979-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90

- min. recess depth 95 mm
- max. recess depth 160 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90


xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold

SERIES SPECIFIC

36 503 979

Product version from 9/1/2022

mm [inches]

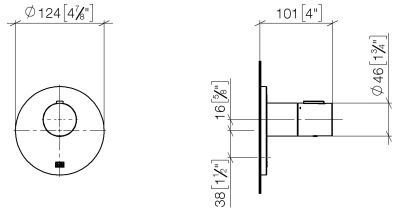

Flow rate chart



Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 979 Product version from 9/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC

36 503 979 Product version from 9/1/2022

