

xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold


SERIES SPECIFIC

36 503 985


Product version from 9/1/2022




- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Light Gold	36 503 985-27
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Brushed Durabrass (23kt Gold)	36 503 985-28
	Matte Black	36 503 985-33
	Brushed Champagne (22kt Gold)	36 503 985-46
	Champagne (22kt Gold)	36 503 985-47
	Brushed Chrome	36 503 985-93
	Brushed Dark Platinum	36 503 985-99


Required miscellaneous

	<b>xTOOL Concealed thermostat module without volume control -</b> •min. recess depth 95 mm •max. recess depth 160 mm	35 503 970 90
---	--	---------------

Required miscellaneous

	<b>xGRID Installation track 555 mm -</b>	12 360 970 90
---	--	---------------

Recommended miscellaneous

	<b>xGRID Attachment set for integrating in the dry wall construction -</b>	12 340 970 90
---	--	---------------


xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold

SERIES SPECIFIC

36 503 985

Product version from 9/1/2022

mm [inches]

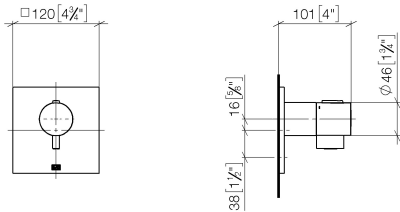

Flow rate chart



Codes & Standards

DIN 4109	EN 1111	ISO 3822	Scottish Water Byelaws
UK Water Supply Regulations	Ü-Zeichen		



xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold    SERIES SPECIFIC

---

36 503 985    Product version from 9/1/2022

Certificates and sustainability

---

WRAS_2011	DVGW_DW- 6512DN0	LGA_29
-----------	---------------------	--------

**xTOOL Concealed thermostat without volume control 3/4" - Brushed Light Gold SERIES SPECIFIC**

36 503 985 Product version from 9/1/2022

