

xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabross (23kt Gold)

IMO

36 503 985



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

	Brushed Durabross (23kt Gold)	36 503 985-28
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Matte Black	36 503 985-33
	Brushed Champagne (22kt Gold)	36 503 985-46
	Champagne (22kt Gold)	36 503 985-47
	Brushed Chrome	36 503 985-93
	Brushed Dark Platinum	36 503 985-99

Fits: IMO, MEM, CL.1, CYO

Required miscellaneous



- xTOOL Concealed thermostat module without volume control -**
- max. recess depth 160 mm
 - min. recess depth 95 mm

35 503 970 90

Recommended miscellaneous



- xGRID Attachment set for integrating in the dry wall construction -**

12 340 970 90

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90

xTOOL Concealed thermostat without volume control 3/4" - Brushed Durabronze (23kt Gold)

IMO

36 503 985
mm [inches]




Flow rate chart



Certificates

WRAS_2011026. DVGW_DW- LGA_29930. LGA_29932.
6512DN0706.

36 503 985

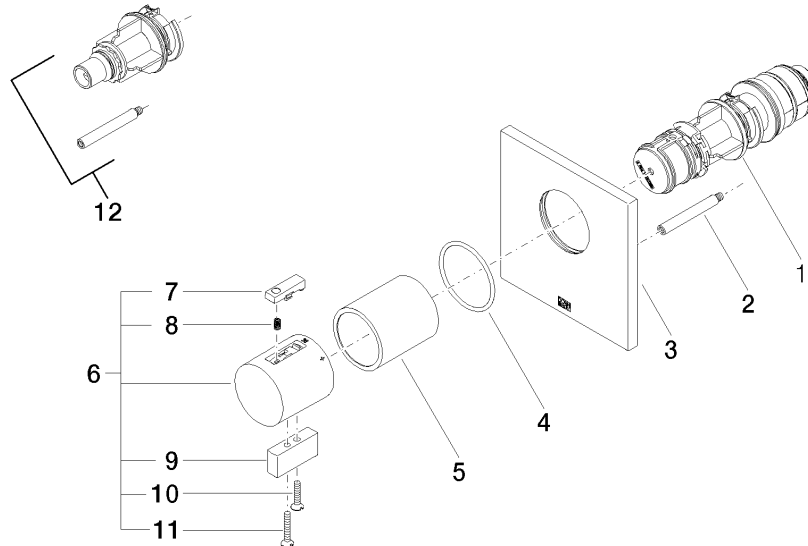

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 15 02 065 00 90	cartridge	1	2
2	90 31 09 095 00 90	bar	1	2
3	09 11 02 196-28	cover	1	60
4	90 14 10 049 00 90	seal	1	2
5	90 21 02 112 00-28	sleeve	1	20
6	04 17 33 006 00-28	handle	1	60
7	90 21 33 011 00-13	handle	1	2
8	90 16 02 027 00 90	spring	1	2
9	09 20 33 006-28	handle	1	20
10	09 30 30 159-28	screw	1	20
11	09 30 30 160-28	screw	1	20
12	12 178 970 90	Extension 46 mm -	1	2