

SERENITY SKY Rain panel for recessed ceiling installation with light FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979 Product version from 9/1/2024



- exposed trim parts
- Rain panel with 2 different spray modes
- PURIFY RAIN, 175 x 175 mm, max. flow rate 6.8 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 6.8 l/min (at 3 bar)
- Rain panel, 600 x 420 mm
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool

Ceiling module power supply

- 24V DC (CV)

Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.

includes light bulbs with a Class G energy efficiency

includes light bulbs with a Class G energy efficiency

| | | |
|--|-------------------------------|---------------|
| | Brushed Champagne (22kt Gold) | 41 773 979-46 |
| | Chrome | 41 773 979-00 |
| | Dark Chrome | 41 773 979-19 |
| | Brushed Bronze | 41 773 979-42 |
| | Champagne (22kt Gold) | 41 773 979-47 |
| | Brushed Stainless Steel | 41 773 979-86 |
| | Brushed Dark Platinum | 41 773 979-99 |

Required miscellaneous




SERENITY SKY Concealed ceiling installation box with light - 35 771 970 90

- concealed rough parts
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- 2x female thread 1/2" connections
- min. recess depth 150 mm
- weight 15kg
- Supply pipe 7 m
- Input 100-240V AC 50-60Hz
- Output 24V DC SELV / Class 2
- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway


SERENITY SKY Rain panel for recessed ceiling installation with light FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979 Product version from 9/1/2024
mm [inches]
1:10

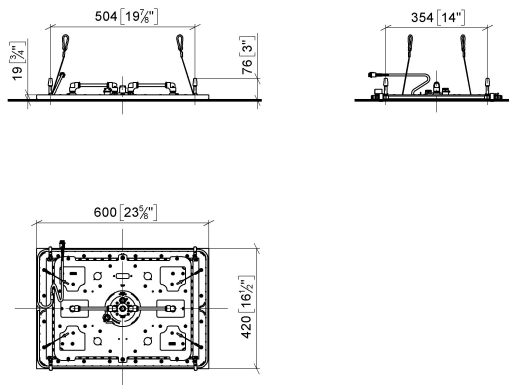

Flow rate chart

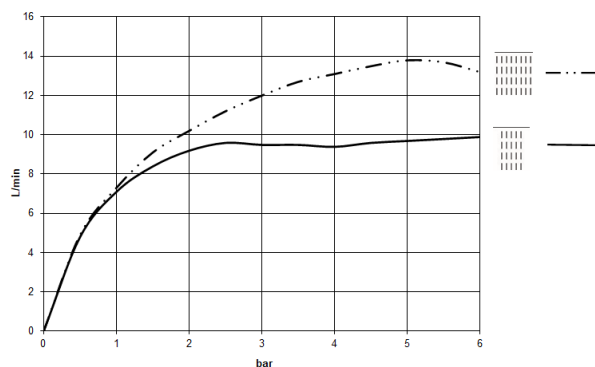

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



SERENITY SKY Rain panel for recessed ceiling installation with light
FlowReduce - Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 773 979 Product version from 9/1/2024

Certificates and sustainability

LGA_38

WRAS_250102



Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|------------------------|---------------|---------------|
| 2 | 91 16 02 053 00 90 | holder | 2.00 | 2 |
| 1 | 90 12 01 095 03 90 | shower | 1.00 | 2 |
| 4 | 90 12 05 106 00-46 | cover | 1.00 | 30 |
| 3 | 90 10 01 263 00 90 | electronic accessories | 1.00 | 2 |
| 5 | 90 30 04 033 01 90 | hose | 1.00 | 2 |