








SYMETRICS xTOOL Thermostat module - Chrome

IMO

ST 060 113 2985



- cover plate 120 x 120 mm
- rosette 60 x 60 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- 2x head part with cut-to-length spindle and sleeve

	Chrome	ST 060 113 2985-00
	Brushed Platinum	ST 060 113 2985-06
	Platinum	ST 060 113 2985-08
	Brushed Light Gold	ST 060 113 2985-27
	Brushed Durabronze (23kt Gold)	ST 060 113 2985-28
	Brushed Chrome	ST 060 113 2985-93
	Brushed Dark Platinum	ST 060 113 2985-99

Individual components of this set

You need the following components for this set



1x 36 503 985-00











2x 36 607 985-00

ST 060 113 2985

Error: Subreport could not be shown.



- rosette 60 x 60 mm
- head part with cut-to-length spindle and sleeve
- WRAS 2011026, 2010066

	Chrome	36 607 985-0
	Brushed Platinum	36 607 985-0
	Platinum	36 607 985-0
	Dark Chrome	36 607 985-1
	Brushed Light Gold	36 607 985-2
	Brushed Durabronze (23kt Gold)	36 607 985-2
	Brushed Chrome	36 607 985-9
	Brushed Dark Platinum	36 607 985-9

ST 060 113 2985

0  
—  
6  
—  
8  
—  
9  
—  
7  
—  
8  
—  
3  
—  
9  
—

Required miscellaneous




Wall valve 1/2" -  
•max. recess depth 145 mm  
•min. recess depth 75 mm

35 607 970 90

ST 060 113 2985

mm [inches]



Certificates


IAPMO_4976	DVGW_DW-6501DN0	WRAS_2010	LGA_29	LGA_29
DVGW_DW-6512DN0	WRAS_2011			

Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	EN 1111
EN 200	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations

Ü-Zeichen

**Product version from 6/1/2024**

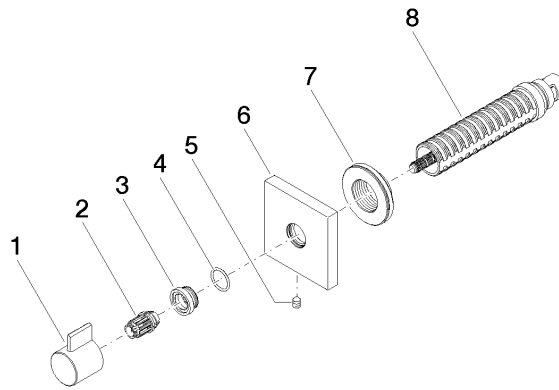



SYMETRICS xTOOL Thermostat module - Chrome

IMO

ST 060 113 2985

Spare parts list

Product version from 6/1/2024

No.	Item Number	Name	Quantity used	Delivery time
	09 20 98 002-00	handle	8	10