

Wall-mounted basin spout without pop-up waste - Dark Chrome

SERIES SPECIFIC

13 800 882




- 190mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- rosette Ø 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

For Touchfree control please order eSet Touchfree with temperature adjustment


	Dark Chrome	13 800 882-19
	Chrome	13 800 882-00
	Brushed Durabrass (23kt Gold)	13 800 882-28
	Brushed Bronze	13 800 882-42
	Brushed Champagne (22kt Gold)	13 800 882-46
	Champagne (22kt Gold)	13 800 882-47
	Brushed Chrome	13 800 882-93
	Brushed Dark Platinum	13 800 882-99

Recommended miscellaneous


	<b>Concealed wall elbow -</b>	35 085 970 90
	<ul style="list-style-type: none"> <li>• max. recess depth 163 mm</li> <li>• min. recess depth 90 mm</li> </ul>	

13 800 882

mm [inches]

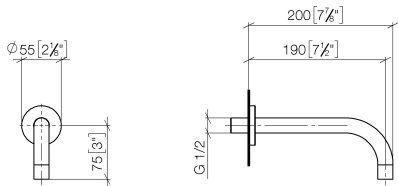

Flow rate chart

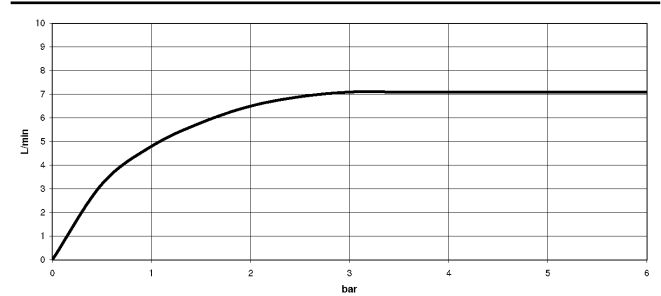

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------

Ü-Zeichen



## Wall-mounted basin spout without pop-up waste - Dark Chrome

---

SERIES SPECIFIC

13 800 882

Certificates and sustainability

---

LGA\_29

WRAS\_240602

