



**Rain shower:**

- rain shower Ø 300 mm
- overhead shower: rain flow
- max. rainshower flow 14 l/min
- Function from: 10 l/min

**hand shower:**

**Control element:**

- rotary diverter for fixed-riser shower/hand shower
- 1500 mm metal shower hose











**Technical data:**


- shower with fixed riser projection 420mm
- height of fittings up to rain shower (bottom edge) 850mm
- height of fittings up to top edge of elbow 1167mm
- rosette for shower holder Ø 55mm
- rosette for wall mounting Ø 57mm
- rosette for shower mixer Ø 65mm
- Pipe diameter 20 mm
- gauge 150 mm - 13 mm
- 1/2" connection

**Notes:**

This article does not include a hand shower!

Intrinsic protection against back flow.

|   |                               |               |
|---|-------------------------------|---------------|
|    | Chrome                        | 26 622 892-00 |
|    | Brushed Platinum              | 26 622 892-06 |
|    | Platinum                      | 26 622 892-08 |
|    | Dark Chrome                   | 26 622 892-19 |
|    | Brushed Durabrass (23kt Gold) | 26 622 892-28 |
|    | Matte Black                   | 26 622 892-33 |
|    | Brushed Dark Brass            | 26 622 892-39 |
|    | Brushed Bronze                | 26 622 892-42 |
|    | Brushed Champagne (22kt Gold) | 26 622 892-46 |
|   | Champagne (22kt Gold)         | 26 622 892-47 |
|  | Brushed Chrome                | 26 622 892-93 |
|  | Brushed Dark Platinum         | 26 622 892-99 |

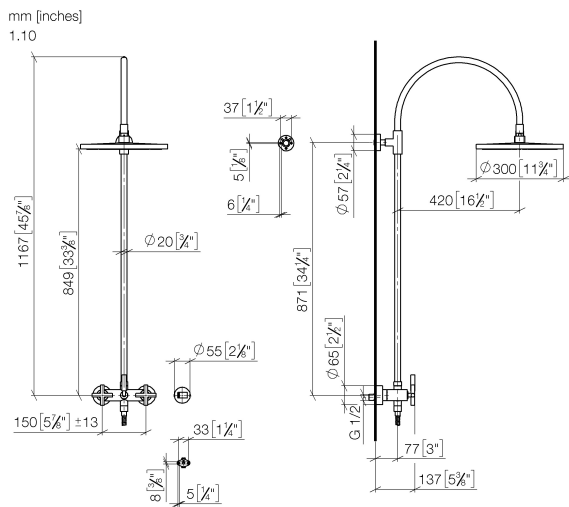

Flow rate chart



## Codes & Standards

DIN 4109

EN 1717

ISO 3822

Ü-Zeichen



## TARA Showerpipe with shower mixer without hand shower 300 mm - Chrome

---

TARA

26 622 892 Product version from 4/1/2024

### Certificates and sustainability

---

Belgaqua\_24-004-2 LGA\_38

