

MADISON Showerpipe with shower mixer without hand shower - Durabrass (23kt Gold)

MADISON

26 632 360

- shower with fixed riser projection 420mm
- overhead shower: rain flow
- rain shower Ø 200 mm
- max. rainshower flow 14 l/min
- Function from: 8 l/min
- rotary diverter for fixed-riser shower/hand shower
- height of fittings up to top edge of elbow 1180mm
- height of fittings up to rain shower (bottom edge) 1009mm
- rosette for shower holder Ø 66mm
- rosette for wall mounting Ø 70mm
- rosette for shower mixer Ø 60mm
- gauge 150 mm - 13 mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" connection
- Pipe diameter 20 mm
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

This article does not include a hand shower!

Intrinsic protection against back flow.

	Durabrass (23kt Gold)	26 632 360-09
	Chrome	26 632 360-00
	Brushed Platinum	26 632 360-06
	Platinum	26 632 360-08
	Brushed Durabrass (23kt Gold)	26 632 360-28
	Brushed Dark Platinum	26 632 360-99

Required miscellaneous

MADISON Hand shower - Durabrass (23kt Gold)

28 002 978-09

- spray head Ø 95mm
- Hand shower see page {PAGE}
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate l/min (at 3 bar)

Required miscellaneous

MADISON Hand shower FlowReduce - Durabrass (23kt Gold)

28 002 978-09 0010

- spray head Ø 95mm
- Hand shower see page {PAGE}
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate l/min (at 3 bar)

Required miscellaneous

MADISON Metal hand shower with porcelain insert (white) FlowReduce - Durabrass (23kt Gold)

28 002 970-09 0010


MADISON Showerpipe with shower mixer without hand shower - Durabronss (23kt Gold)

MADISON

26 632 360
mm [inches]



Flow rate chart

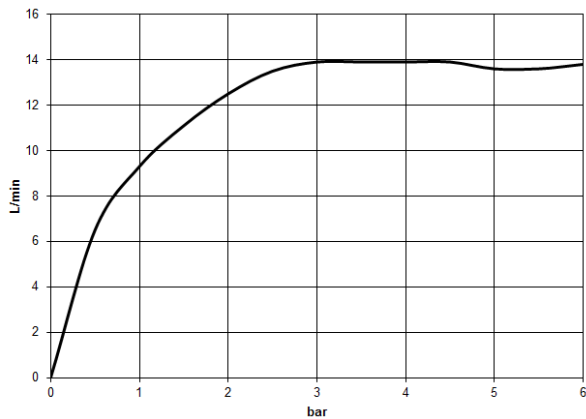

Codes & Standards

DIN 4109

EN 1717

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



MADISON Showerpipe with shower mixer without hand shower - Durabrass
(23kt Gold)

MADISON

26 632 360

Certificates and sustainability

Belgaqua_21-023-2 LGA_29

WRAS_2204

This exploded view diagram illustrates the components of a shower head assembly. The parts are numbered as follows:

- 1**: The shower head body, featuring a circular base with multiple spray nozzles.
- 2**: The shower head arm, which connects the shower head to the main supply line.
- 3**: A small O-ring or seal that fits between the shower head arm and the main supply line.
- 4**: A decorative cap or cover for the main supply line connection.
- 5**: The main supply line, a long vertical pipe that carries water from the main valve to the shower head.
- 6**: The main valve assembly, which controls the flow of water into the shower head.
- 7**: A threaded insert or sleeve that fits into the main valve assembly.
- 8**: A decorative cap or cover for the main valve assembly.

No.	Item Number	Name	Quantity used	Delivery time
2	04 28 22 101 20-09	spout	1.00	40
5	90 28 22 096 00-09	pipe	1.00	-
Spare part can no longer be ordered, please order the replacement item				
6	04 17 10 001 00-09	fitting	1.00	40
7	28 104 970-09	Metal shower hose 1/2" x 1/2" x 1250 mm - Durabrass (23kt Gold)	1.00	40
4	90 17 11 033 00-09	holder	1.00	-
Spare part can no longer be ordered, please order the replacement item				
8	28 050 410-09	holder	1.00	60
3	90 14 10 011 00 90	seal	1.00	2
1	04 12 05 038 01-09	shower	1.00	40