


Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed **SERIES SPECIFIC**
Platinum

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
 - PURE RAIN, max. flow rate 12 l/min (at 3 bar)
 - PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
 - min. recess depth 137 mm
 - with anti-scale system
- Ceiling module power supply**
- 12V DC (CV)
- Spot lighting**
- LED coloured light RGBW
 - Bulbs protected against splashing water
- Ambient lighting**
- LED coloured light RGBW
 - Bulbs protected against splashing water
- Activation**
- ZigBee Light Link RGBW controller
 - Provided by customer: Zigbee gateway
- Environment**
- Not suitable for outdoor use.
 - Not suitable for use in a steam room.
 - Not suitable for use in chlorinated or salty environments.
 - Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
 - Dornbracht recommends consulting a systems integrator.
 - WRAS
- includes light bulbs with a Class G energy efficiency**
- includes light bulbs with a Class G energy efficiency

	Brushed Platinum	28 044 980-06
	Chrome	28 044 980-00
	Platinum	28 044 980-08
	Dark Chrome	28 044 980-19
	Brushed Light Gold	28 044 980-27
	Brushed Durabrass (23kt Gold)	28 044 980-28
	Matte Black	28 044 980-33
	Brushed Champagne (22kt Gold)	28 044 980-46
	Champagne (22kt Gold)	28 044 980-47
	Brushed Chrome	28 044 980-93
	Brushed Dark Platinum	28 044 980-99


Required miscellaneous




- Concealed ceiling installation box 35 044 970 90 for recessed ceiling installation with light -**
- flush-mounted installation box 360x 300 mm RAL 9003 signal white
 - recess depth 137mm
 - Input 100-240V AC 50-60Hz
 - concealed rough parts
 - Output 12V DC SELV / Class 2
 - ZigBee Light Link RGBW controller

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Platinum SERIES SPECIFIC

28 044 980 Product version from 5/1/2022
mm [inches]

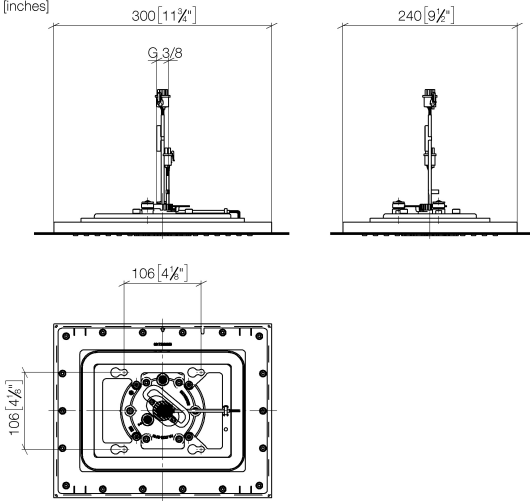

Flow rate chart

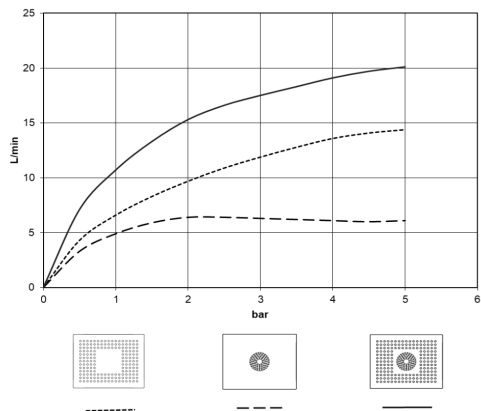

Codes & Standards

DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	---------------------------	--------------------------------

Ü-Zeichen



Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Platinum

28 044 980 Product version from 5/1/2022


Certificates and sustainability

LGA_38

WRAS_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed SERIES SPECIFIC Platinum

28 044 980 Product version from 5/1/2022

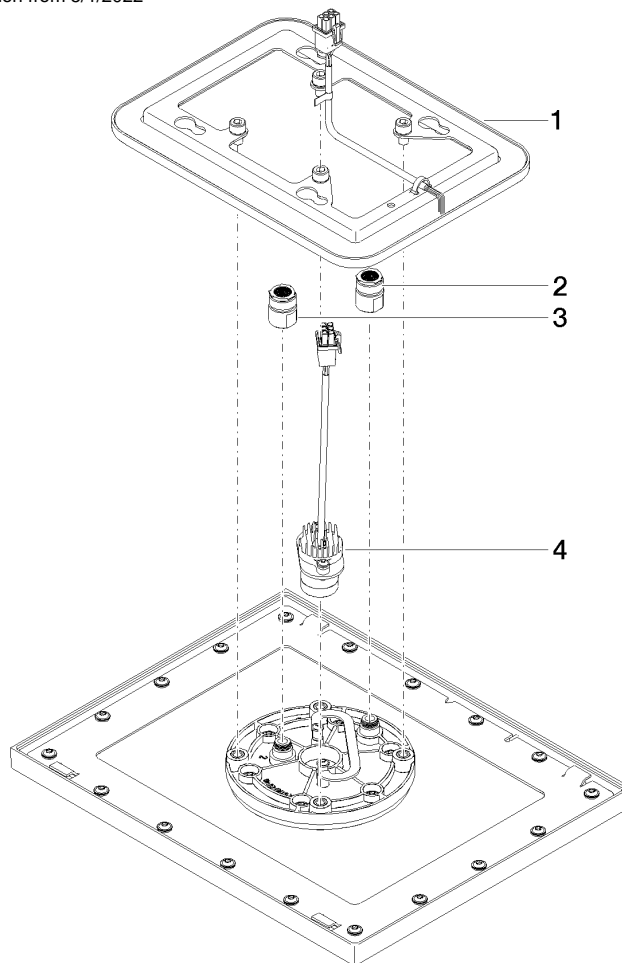

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 24 03 309 01 90	connection	1.00	2
4	90 10 01 225 00 90	electronic accessories	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
1	90 10 01 224 00 90	electronic accessories	1.00	2