






DORNBRAUCH LYV Single-lever mixer Pull-out - Soft Black

DORNBRAUCH
LYV

33 845 110




- 237mm projection
 - pivotable spout 120°
 - air-enriched flow and spray flow
 - fabric braided hose 1500 mm
 - max. flow 8.8 l/min at 3 bar flow pressure
- Intrinsic protection against back flow.

| | | |
|---|----------------|---------------|
|  | Soft Black | 33 845 110-69 |
|  | Chrome | 33 845 110-00 |
|  | Brushed Nickel | 33 845 110-70 |

33 845 110

mm [inches]

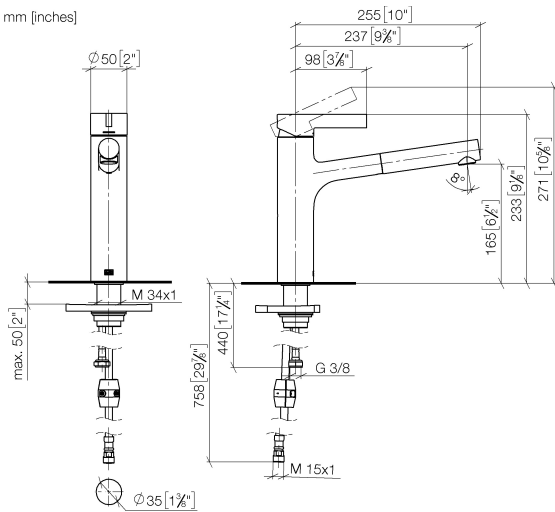

Flow rate chart



Codes & Standards

DIN 4109

EN 1717

EN 817

ISO 3822

Ü-Zeichen

XP P 41-280



DORNBRACHT LYV Single-lever mixer Pull-out - Soft Black

DORNBRACHT LYV


33 845 110

Certificates and sustainability

| | | | |
|-------------------|---------------|--------|-----------------|
| Belgaqua_23-012-2 | ACS_23 ACC NY | AbP_10 | DVGW_DW-6506DN0 |
|-------------------|---------------|--------|-----------------|

33 845 110

Parts for other
finishes can be found
here: [Chrome](#)

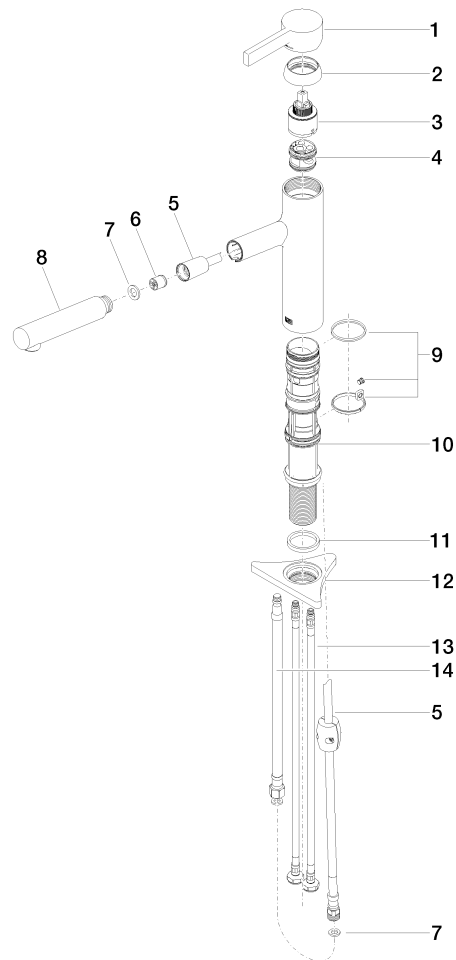

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--------------|---------------|---------------|
| 10 | 90 30 01 211 00 90 | shaft | 1.00 | 2 |
| 2 | 90 28 30 010 00-69 | cover | 1.00 | 2 |
| 3 | 90 15 05 067 00 90 | cartridge | 1.00 | 2 |
| 4 | 90 18 40 227 00 90 | insert | 1.00 | 2 |
| 12 | 90 23 10 003 00 90 | fixing set | 1.00 | 2 |
| 8 | 90 12 11 180 00-69 | shower | 1.00 | 2 |
| 7 | 90 14 05 081 00 90 | seal | 1.00 | 2 |
| 14 | 90 30 04 110 00 90 | hose | 1.00 | 2 |
| 11 | 90 14 05 080 00 90 | seal | 1.00 | 2 |
| 13 | 04 30 04 100 00 90 | hose | 2.00 | 2 |
| 9 | 90 14 15 062 00 90 | gasket kit | 1.00 | 2 |
| 5 | 90 30 02 101 00 90 | hose | 1.00 | 2 |
| 1 | 90 20 81 001 00-69 | handle | 1.00 | 2 |
| 6 | 90 23 01 051 00 90 | flow reducer | 1.00 | 2 |