



- 206mm projection
- pivoting spout 130°
- air-enriched flow and spray flow
- height of mixer 179 mm
- height up to aerator 137 mm
- hole diameter 35 mm
- fabric braided hose 1500 mm
- max. flow 8.3 l/min at 3 bar flow pressure
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Intrinsic protection against back flow.

Recommended miscellaneous

**Dispenser without rosette -
Brushed Bronze**

82 424 970-42




Recommended miscellaneous

**Strainer waste with control handle
- Brushed Bronze**

10 712 970-42



Flow rate chart

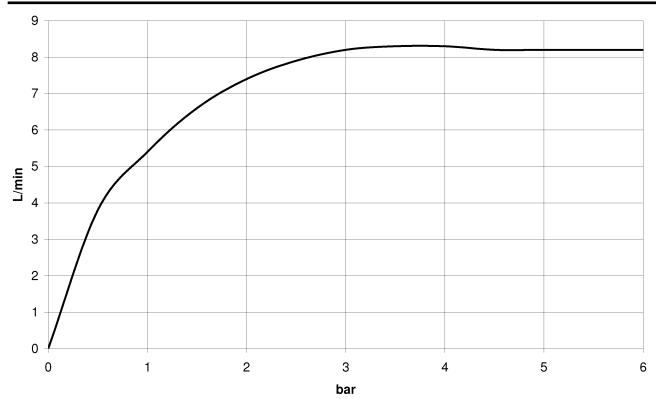

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen




ENO Single-lever mixer Pull-out with spray function - Brushed Bronze

ENO

33 871 760 Product version from 4/1/2024

Certificates and sustainability

LGA_38

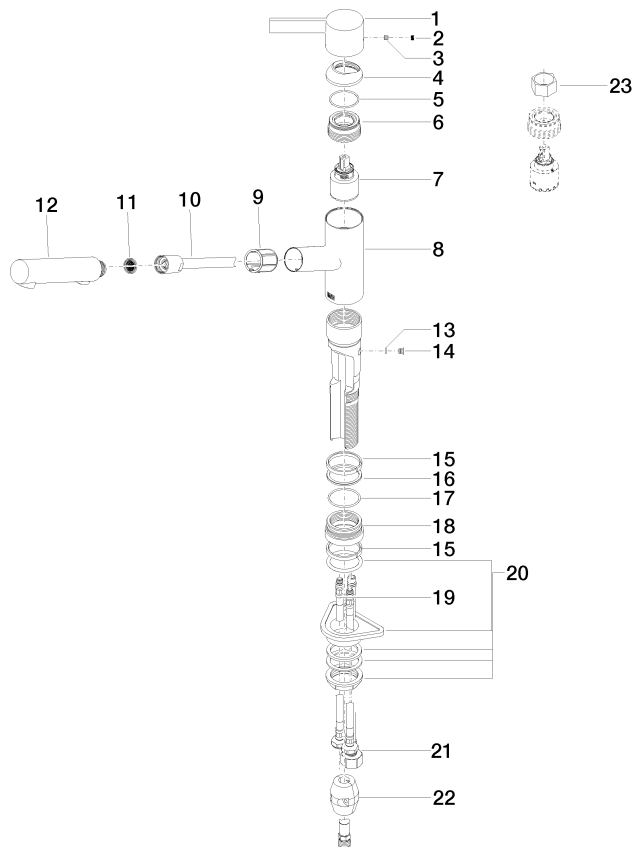



ENO Single-lever mixer Pull-out with spray function - Brushed Bronze

ENO

33 871 760 Product version from 4/1/2024

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	09 14 10 102 90	seal	1.00	2
16	09 28 10 144 90	ring	1.00	2
15	09 14 15 029 90	ring	1.00	2
7	90 15 05 064 00 90	cartridge	1.00	2
22	04 21 50 005 00 90	accessories	1.00	2
19	04 30 04 100 00 90	hose	2.00	2
10	90 30 02 062 00-42	hose	1.00	30
18	09 27 76 001-42	rosette	1.00	60
8	09 19 76 001-42	sleeve	1.00	60
14	09 30 30 113 20 90	screw	1.00	2
4	09 28 30 012-42	cover	1.00	60
17	09 14 10 034 90	seal	1.00	2
11	09 23 01 039 90	sieve	1.00	2
9	09 18 40 099 90	sleeve	1.00	2
1	09 20 76 001-42	handle	1.00	60
6	09 24 04 270 90	nut	1.00	2
23	90 30 09 031 00 90	key	1.00	2
21	04 30 04 029 00 90	hose	1.00	2
2	90 31 20 109 00 90	plug	1.00	2
20	04 30 11 040 00 90	fixing set	1.00	2
13	09 14 10 001 90	seal	1.00	2
3	90 31 11 030 00 90	pin	1.00	2
12	90 12 11 185 00-42	shower	1.00	30