


VAIA xTOOL Concealed thermostat without volume control 1/2" - Brushed Bronze

VAIA

36 501 809 Product version from 4/1/2025



- cover plate Ø 123 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Bronze	36 501 809-42
	Chrome	36 501 809-00
	Brushed Platinum	36 501 809-06
	Platinum	36 501 809-08
	Dark Chrome	36 501 809-19
	Brushed Durabronze (23kt Gold)	36 501 809-28
	Brushed Dark Brass	36 501 809-39
	Brushed Champagne (22kt Gold)	36 501 809-46
	Champagne (22kt Gold)	36 501 809-47
	Brushed Dark Platinum	36 501 809-99

Required miscellaneous



xTOOL Concealed thermostat module without volume control - 35 503 970 90
 •min. recess depth 85 mm
 •max. recess depth 110 mm

Required miscellaneous



xGRID Installation track 555 mm - 12 360 970 90

Recommended miscellaneous




xGRID Attachment set for integrating in the dry wall construction - 12 340 970 90


VAIA xTOOL Concealed thermostat without volume control 1/2" - Brushed Bronze

VAIA

36 501 809 Product version from 4/1/2025
mm [inches]

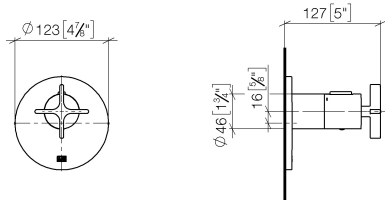

Flow rate chart

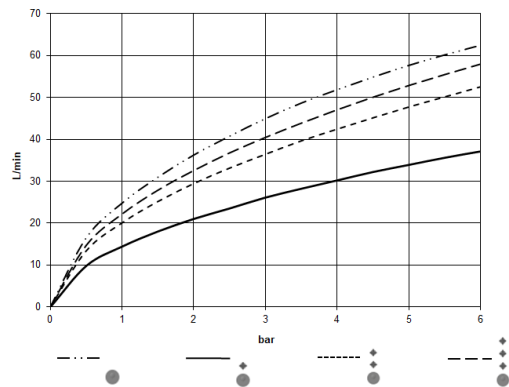

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen




VAIA xTOOL Concealed thermostat without volume control 1/2" - Brushed Bronze

VAIA

36 501 809 Product version from 4/1/2025

Certificates and sustainability

WRAS_2011	LGA_29	LGA_29	LGA_29
-----------	--------	--------	--------

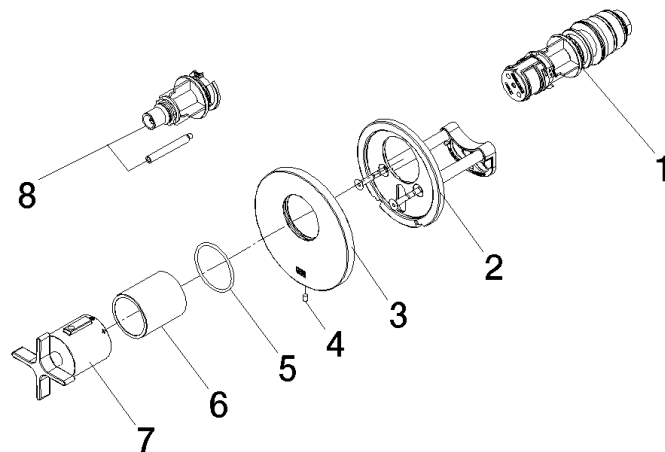

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
5	90 14 10 049 00 90	seal	1.00	2
3	09 11 02 537-42	cover	1.00	30
4	09 31 11 048 90	pin	1.00	2
6	90 21 02 112 00-42	sleeve	1.00	30
7	90 17 33 029 00-42	handle	1.00	30
8	12 178 970 90	Extension 46 mm -	1.00	2
2	90 11 01 196 00 90	base	1.00	2
1	90 15 02 065 00 90	cartridge	1.00	2