








MADISON xTOOL Concealed thermostat without volume control 1/2" - Platinum
MADISON


36 501 977
Product version up to 2/2/2021



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Platinum	36 501 977-08
	Chrome	36 501 977-00
	Brushed Platinum	36 501 977-06
	Durabrand (23kt Gold)	36 501 977-09
	Brushed Durabrand (23kt Gold)	36 501 977-28
	Brushed Dark Brass	36 501 977-39
	Brushed Dark Platinum	36 501 977-99


Required miscellaneous

	xTOOL Concealed thermostat module without volume control - •max. recess depth 110 mm •min. recess depth 85 mm	35 503 970 90
---	--	---------------

Required miscellaneous


	xGRID Installation track 555 mm -	12 360 970 90
---	--	---------------

Recommended miscellaneous

	xGRID Attachment set for integrating in the dry wall construction -	12 340 970 90
---	--	---------------

36 501 977 Product version up to 2/2/2021

mm [inches]

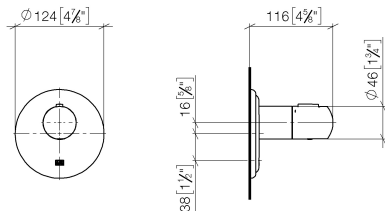

Flow rate chart



Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen




MADISON xTOOL Concealed thermostat without volume control 1/2" - Platinum

MADISON

36 501 977 Product version up to 2/2/2021

Certificates and sustainability

WRAS_2011	DVGW_DW-6512DN0	LGA_29	LGA_29
-----------	-----------------	--------	--------

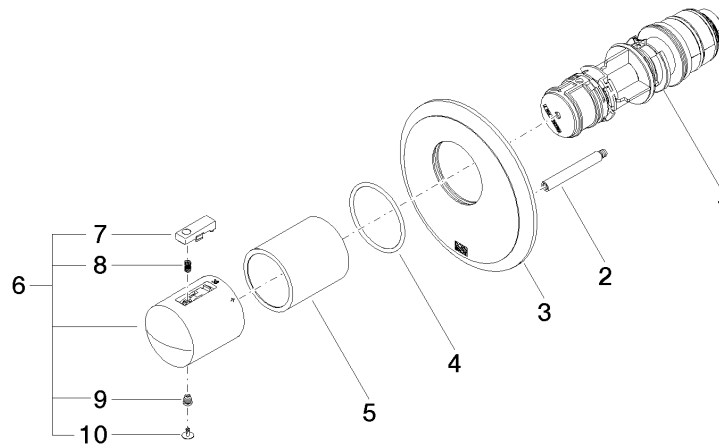

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
3	09 11 02 391-08	plate	1.00	40
8	90 16 02 027 00 90	spring	1.00	2
4	90 14 10 049 00 90	seal	1.00	2
5	90 21 02 112 00-08	sleeve	1.00	40
2	90 31 09 095 00 90	bar	1.00	2
6	90 17 33 005 01-08	handle	1.00	40
9	90 30 30 136 00 90	screw	1.00	2
10	90 31 20 049 00-13	plug	1.00	30
7	90 21 33 011 00-13	handle	1.00	2
1	90 15 02 065 00 90	cartridge	1.00	2