

36 503 809



- cover plate Ø 123 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Chrome	36 503 809-00
	Brushed Platinum	36 503 809-06
	Platinum	36 503 809-08
	Dark Chrome	36 503 809-19
	Brushed Durabronze (23kt Gold)	36 503 809-28
	Brushed Bronze	36 503 809-42
	Brushed Champagne (22kt Gold)	36 503 809-46
	Champagne (22kt Gold)	36 503 809-47
	Brushed Dark Platinum	36 503 809-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 • max. recess depth 110 mm  
 • min. recess depth 85 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**




**xGRID Installation track 555 mm -** 12 360 970 90

36 503 809

mm [inches]

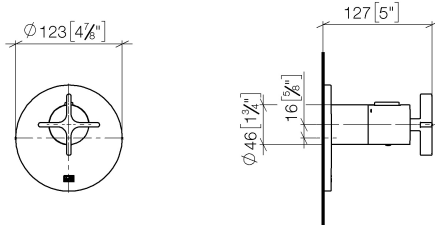

Flow rate chart

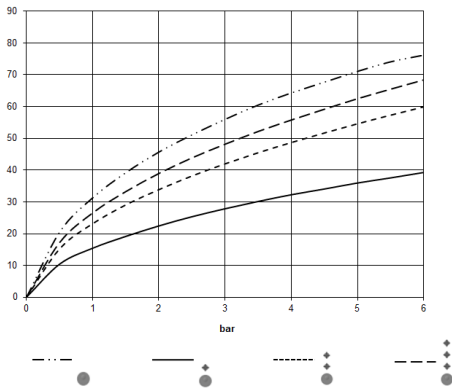

Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



VAIA xTOOL Concealed thermostat without volume control 3/4" - Chrome

VAIA

36 503 809


Certificates

LGA\_29

LGA\_29

LGA\_29

WRAS\_2011

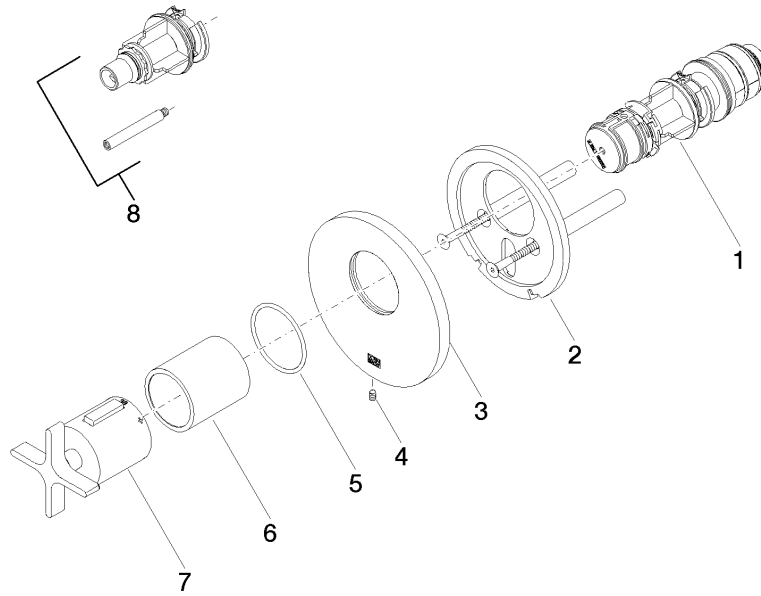



VAIA xTOOL Concealed thermostat without volume control 3/4" - Chrome

VAIA

36 503 809

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
	90 15 02 063 00 90	cartridge	8	2