

36 503 809



- cover plate Ø 123 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS 2011026

	Dark Chrome	36 503 809-19
	Chrome	36 503 809-00
	Brushed Platinum	36 503 809-06
	Platinum	36 503 809-08
	Brushed Durabronze (23kt Gold)	36 503 809-28
	Brushed Bronze	36 503 809-42
	Brushed Champagne (22kt Gold)	36 503 809-46
	Champagne (22kt Gold)	36 503 809-47
	Brushed Dark Platinum	36 503 809-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 • max. recess depth 110 mm  
 • min. recess depth 85 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**



**xGRID Installation track 555 mm -** 12 360 970 90

36 503 809

mm [inches]

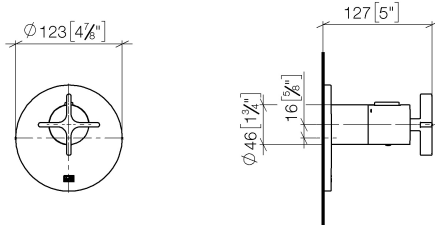

Codes & Standards


DIN 4109	ISO 3822	Scottish Water Byelaws	UK Water Supply Regulations
----------	----------	------------------------	-----------------------------

Ü-Zeichen

Certificates

LGA_29	LGA_29	LGA_29	WRAS_2011
--------	--------	--------	-----------

36 503 809

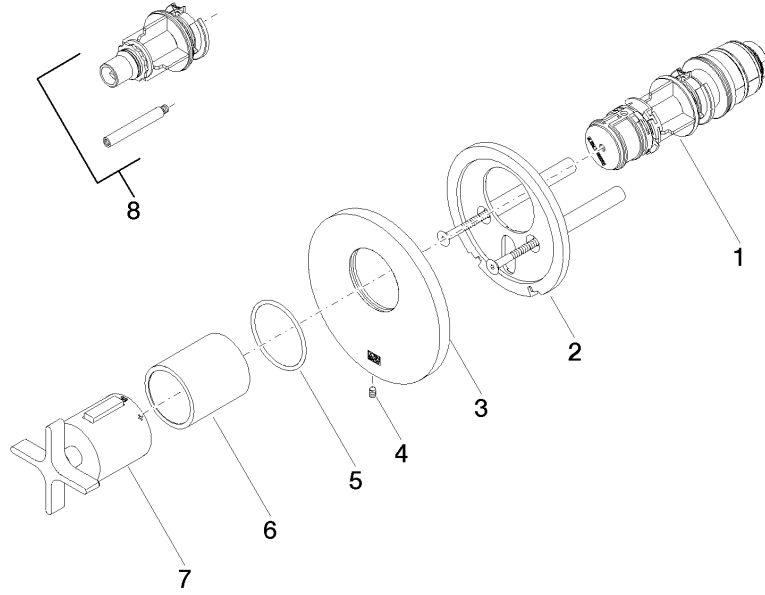



36 503 809

## Spare parts list