

## xTOOL Concealed thermostat without volume control 3/4" - Brushed Dark Platinum

SERIES SPECIFIC

36 503 985 Product version up to 1/1/2022



- cover plate 120 x 120 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Brushed Dark Platinum	36 503 985-99
	Chrome	36 503 985-00
	Brushed Platinum	36 503 985-06
	Platinum	36 503 985-08
	Dark Chrome	36 503 985-19
	Brushed Light Gold	36 503 985-27
	Brushed Durabronze (23kt Gold)	36 503 985-28
	Matte Black	36 503 985-33
	Brushed Champagne (22kt Gold)	36 503 985-46
	Champagne (22kt Gold)	36 503 985-47
	Brushed Chrome	36 503 985-93

### Required miscellaneous



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90

- max. recess depth 160 mm
- min. recess depth 95 mm

### Recommended miscellaneous



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90

### Required miscellaneous



**xGRID Installation track 555 mm -** 12 360 970 90

36 503 985 Product version up to 1/1/2022  
mm [inches]



### Flow rate chart



### Codes & Standards

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen




xTOOL Concealed thermostat without volume control 3/4" - Brushed Dark  
Platinum

SERIES SPECIFIC

36 503 985    Product version up to 1/1/2022

Certificates and sustainability

WRAS_2011	DVGW_DW- 6512DN0	LGA_29	LGA_29
-----------	---------------------	--------	--------

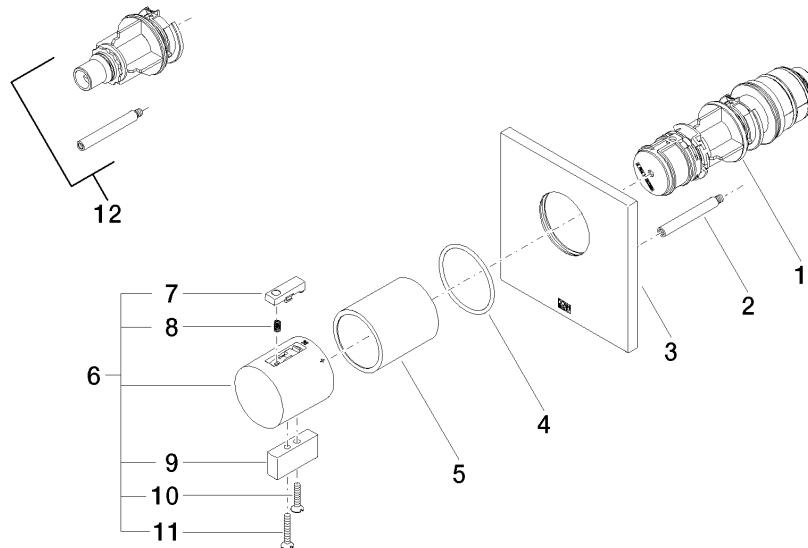

## Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
11	09 30 30 160-99	screw	2.00	20
6	04 17 33 006 00-99	handle	1.00	60
3	09 11 02 196-99	cover	1.00	60
10	09 30 30 159-99	screw	1.00	20
8	90 16 02 027 00 90	spring	1.00	2
12	12 178 970 90	Extension 46 mm -	1.00	2
9	09 20 33 006-99	handle	1.00	20
5	90 21 02 112 00-99	sleeve	1.00	20
2	90 31 09 095 00 90	bar	1.00	2
4	90 14 10 049 00 90	seal	1.00	2
7	90 21 33 011 00-13	handle	1.00	2
1	90 15 02 063 00 90	cartridge	1.00	2