







**SERENITY SKY+ Rain panel for recessed ceiling installation - Champagne (22kt Gold)**

41 780 979



- exposed trim parts
- Rain panel with 5 different flow modes
- Rain panel, 600 x 420 mm
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- LAMINAR FLOW, max. flow rate 10 l/min (at 3 bar)
- AQUAPRESSURE FLOW, max. flow rate 9.4 l/min (at 3 bar)
- COOL MIST, max. flow rate 1 l/min (at 3 bar)
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool
- Not suitable for use in a steam room.

|  |                               |               |
|--|-------------------------------|---------------|
|  | Champagne (22kt Gold)         | 41 780 979-47 |
|  | Chrome                        | 41 780 979-00 |
|  | Dark Chrome                   | 41 780 979-19 |
|  | Brushed Bronze                | 41 780 979-42 |
|  | Brushed Champagne (22kt Gold) | 41 780 979-46 |
|  | Brushed Stainless Steel       | 41 780 979-86 |
|  | Brushed Dark Platinum         | 41 780 979-99 |

**Required miscellaneous**




**SERENITY SKY+ Concealed ceiling installation box -** 35 780 970 90

- concealed rough parts
- 5x 1/2" female connector
- flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White
- min. recess depth 150 mm
- weight 15kg




# SERENITY SKY+ Rain panel for recessed ceiling installation - Champagne (22kt Gold)

41 780 979  
mm [inches]  
1:10

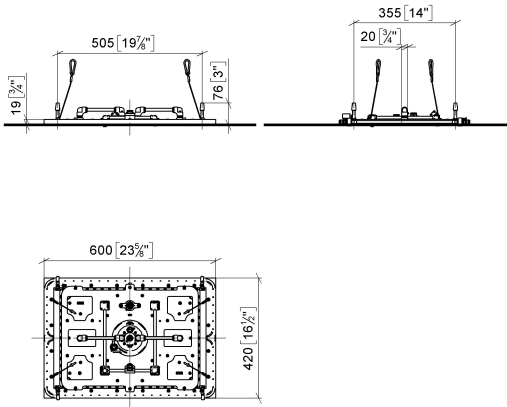

## Flow rate chart

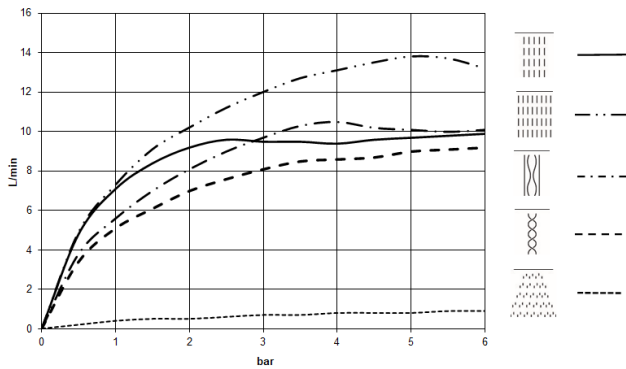



## SERENITY SKY+ Rain panel for recessed ceiling installation - Champagne (22kt Gold)

---

41 780 979



## SERENITY SKY+ Rain panel for recessed ceiling installation - Champagne (22kt Gold)

---

41 780 979

### **Spare parts list**