


SERENITY SKY+ Rain panel for recessed ceiling installation with light -  
Brushed Champagne (22kt Gold)

SERIES-VARIOUS

41 781 979    Product version from 9/1/2024



- exposed trim parts
- Rain panel with 5 different flow modes
- Rain panel, 600 x 420 mm
- PURIFY RAIN, 175 x 175 mm, max. flow rate 10 l/min (at 3 bar)
- FULL RAIN, 455 x 315 mm, max. flow rate 14 l/min (at 3 bar)
- LAMINAR FLOW, max. flow rate 10 l/min (at 3 bar)
- AQUAPRESSURE FLOW, max. flow rate 9.4 l/min (at 3 bar)
- COOL MIST, max. flow rate 1 l/min (at 3 bar)
- min. recess depth 150 mm
- weight 15kg
- feed pipe (hot/cold): 2x DN 20
- with anti-scale system
- Recommended control element: xTool

**Ceiling module power supply**

- 24V DC (CV)

**Ambient lighting**

- LED coloured light RGBW
- Bulbs protected against splashing water

**Activation**

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

**Environment**


- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

	Brushed Champagne (22kt Gold)	41 781 979-46
	Chrome	41 781 979-00
	Dark Chrome	41 781 979-19
	Brushed Bronze	41 781 979-42
	Champagne (22kt Gold)	41 781 979-47
	Brushed Stainless Steel	41 781 979-86
	Brushed Dark Platinum	41 781 979-99

Required miscellaneous


	<b>SERENITY SKY+ Concealed ceiling installation box with light -</b> 35 781 970 90
	<ul style="list-style-type: none"> <li>•concealed rough parts</li> <li>•2x female thread 1/2" connections</li> <li>•flush-mounted reflection box, 662 x 482 mm, RAL 9003, Signal White</li> <li>•min. recess depth 150 mm</li> <li>•weight 15kg</li> <li>•Supply pipe 7 m</li> <li>•Input 100-240V AC 50-60Hz</li> <li>•Output 24V DC SELV / Class 2</li> <li>•ZigBee Light Link RGBW controller</li> <li>•Provided by customer: Zigbee gateway</li> </ul>

# SERENITY SKY+ Rain panel for recessed ceiling installation with light - Brushed Champagne (22kt Gold)


SERIES-VARIOUS

41 781 979 Product version from 9/1/2024

mm [inches]  
1:10

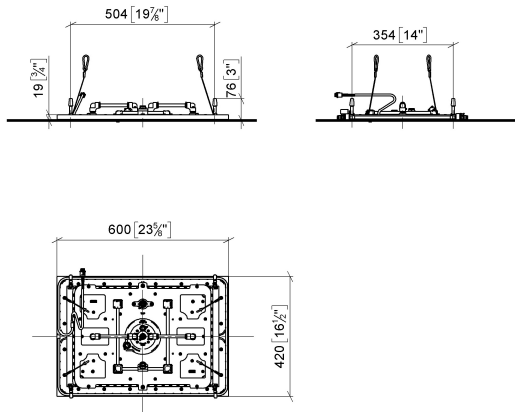

## Flow rate chart

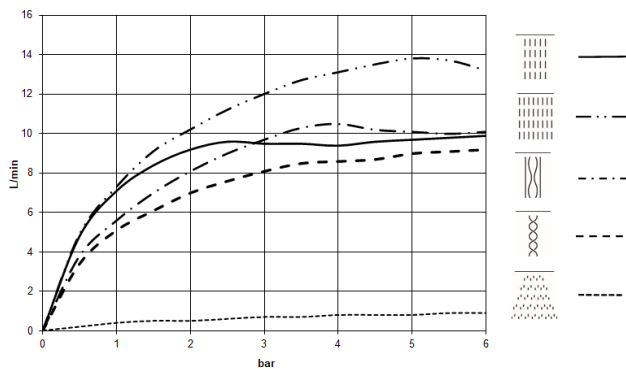

## Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

## Ü-Zeichen



## SERENITY SKY+ Rain panel for recessed ceiling installation with light - Brushed Champagne (22kt Gold)

---

SERIES-VARIOUS


41 781 979 Product version from 9/1/2024

Certificates and sustainability

---

LGA\_38

WRAS\_250102

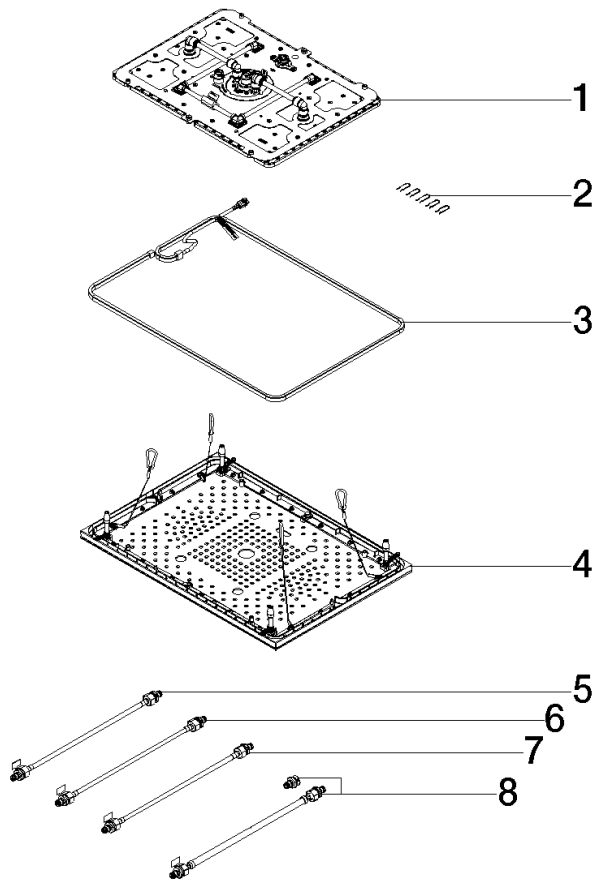

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
	2 91 16 02 053 00 90	holder	1.00	2
	8 90 30 04 033 00 90	hose	1.00	2
	1 90 12 01 095 00 90	shower	1.00	2
	3 90 10 01 263 00 90	electronic accessories	1.00	2
	5 90 30 04 096 01 90	hose	1.00	2
	7 90 30 04 096 03 90	hose	1.00	2
	6 90 30 04 096 02 90	hose	1.00	2
	4 90 12 05 106 00-46	cover	1.00	30