



ST 010 100 1845



- 130mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 95 mm
- height up to aerator 75 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power
- Tob-240 V AC / 12 V Dc, 30-00 Hz, 16 W power supply unit, incl. country-specific adapter set
 This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



42 765 970 90

1x

13 700 845-00



LISSÉ

ST 010 100 1845



ST 010 100 1845



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set Cannot be combined with basins in conducting materials (e.g. steel. river stone).

 Cannot be combined with basins that have a closing drain.

Closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Required miscellaneous

eSET Touchfree Basin mixer with 35 740 970 90 temperature setting for combining with free-standing fittings -

Required miscellaneous



eSET Touchfree Basin mixer with 35 741 970 90 temperature setting for combining with wall-mounted fittings -

- •max. recess depth 125 mm
- •min. recess depth 90 mm


Recommended miscellaneous


Extension for Touchfree 500 mm - 12 765 970 90





ST 010 100 1845 mm [inches]





Certificates

LGA_29120. WRAS_1906116. IAPMO_EGS. CE000001_eSet_Tou CE000002_eSet_Tou


chfree_20171206_D chfree_20171206_E E_signed. N_signed.

LGA_29119.





ST 010 100 1845

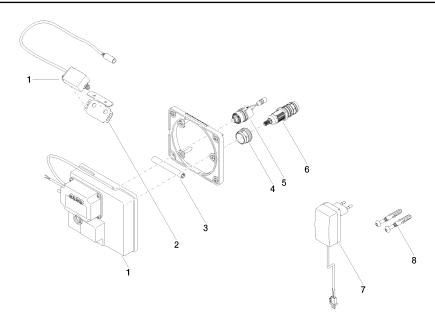

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 177 00 90	electronic accessories	1	2
2	90 17 20 199 00 90	holder	1	2
3	90 23 01 124 00 90	sleeve	1	2
4	09 23 10 129 90	nut	1	2
5	04 30 50 079 00 90	valve	1	2
6	90 15 02 013 00 90	cartridge	1	2
7	04 10 01 246 00 90	electronic accessories	1	2
8	04 30 31 024 01 90	fixing set	1	2



LISSÉ

ST 010 100 1845



- 130mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 95 mm
- height up to aerator 75 mm
- hole diameter 35 mm
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

	Chrome	13 700 845-00
	Dark Chrome	13 700 845-19
	Matte Black	13 700 845-33
	Brushed Chrome	13 700 845-93
	Brushed Dark Platinum	13 700 845-99



LISSÉ

ST 010 100 1845




RT 010 100 1845 mm [inches]

0 49 11/6 130 [s/c*]

Flow rate chart

Ø Ø 35[1¾"]



Certificates

LGA_29120.

IAPMO_N-4976.


WRAS_1909064.

IAPMO_4976 (4).

IAPMO_6397.



ST 010 100 1845

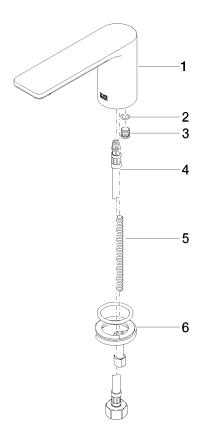

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 11 84 015 00-00	spout	1	10
2	90 14 10 060 00 90	seal	1	2
3	09 31 20 065 90	plug	1	2
4	04 30 04 019 00 90	hose	1	2
5	09 31 11 012 90	pin	1	2
6	04 30 11 038 75 90	fixing set	1	2