



ST 010 100 2845



- 130mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 95 mm
- height up to aerator 75 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Cannot be combined with basins in conducting materials (e.g. steel. river stone).
Cannot be combined with basins that have a

closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

#### Individual components of this set

You need the following components for this set



1x 42 766 970 90

1x

13 700 845-00





LISSÉ

ST 010 100 2845





ST 010 100 2845



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
   Cannot be combined with basins in conducting materials (e.g. steel. river stone).
   Cannot be combined with basins that have a closing drain.
   ATTENTION: Separate terms and conditions for

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).


Cannot be combined with basins that have a closing drain

ATTENTION: Separate terms and conditions for electronic articles are applicable.

### Required miscellaneous




eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings - 35 742 970 90



•min. recess depth 90 mm

•max. recess depth 125 mm





35 743 970 90


#### Recommended miscellaneous


Extension for Touchfree 500 mm - 12 765 970 90





ST 010 100 2845 mm [inches]





### Certificates

LGA\_29120. WRAS\_1906116. IAPMO\_EGS. CE000001\_eSet\_Tou CE000002\_eSet\_Tou


chfree\_20171206\_D chfree\_20171206\_E E\_signed. N\_signed.

LGA\_29119.





ST 010 100 2845

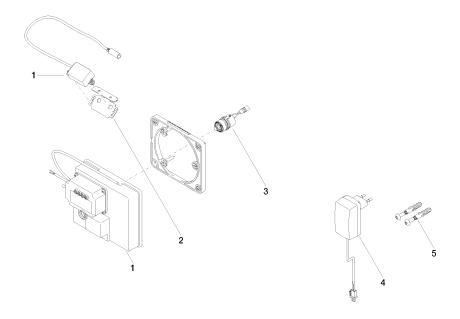

### Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
04 30 50 079 00 90	valve	1	2
04 10 01 050 00 90	power supply	1	60
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 04 30 50 079 00 90 04 10 01 050 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 04 30 50 079 00 90 valve 04 10 01 050 00 90 power supply	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 04 30 50 079 00 90 valve 1 04 10 01 050 00 90 power supply 1



LISSÉ

ST 010 100 2845



- 130mm projection
- fixed spout
- circular, air-enriched flow
- height of mixer 95 mm
- height up to aerator 75 mm
- hole diameter 35 mm
- 1/2" connection
- max. flow 5.7 l/min
- lead-free
   This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

	Chrome	13 700 845-00
	Dark Chrome	13 700 845-19
	Matte Black	13 700 845-33
	Brushed Chrome	13 700 845-93
	Brushed Dark Platinum	13 700 845-99



LISSÉ

ST 010 100 2845




ST 010 100 2845 mm [inches]

0 49 11/6 | 130 [s/c] | 1

### Flow rate chart

Ø Ø 35[1¾"]



### Certificates

LGA\_29120.

IAPMO\_N-4976.


WRAS\_1909064.

IAPMO\_4976 (4).

IAPMO\_6397.



ST 010 100 2845

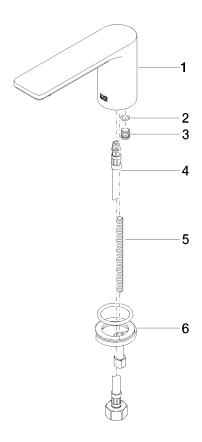

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 11 84 015 00-00	spout	1	10
2	90 14 10 060 00 90	seal	1	2
3	09 31 20 065 90	plug	1	2
4	04 30 04 019 00 90	hose	1	2
5	09 31 11 012 90	pin	1	2
6	04 30 11 038 75 90	fixing set	1	2