

LULU

ST 010 202 2710



- 200mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set This product can help a building meet the
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 Cannot be combined with basins in conducting

Cannot be combined with basins in conducting materials (e.g. steel. river stone). Cannot be combined with basins that have a

Closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



1x 42 766 970 90

1x

13 800 710-00





LULU

ST 010 202 2710





ST 010 202 2710



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
 Cannot be combined with basins in conducting materials (e.g. steel. river stone).
 Cannot be combined with basins that have a closing drain.
 ATTENTION: Separate terms and conditions for

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with free-standing fittings - 35 742 970 90

Required miscellaneous



eSET Touchfree Basin mixer without temperature setting for combining with wall-mounted fittings -

fittings -min. recess depth 90 mm

•max. recess depth 125 mm

35 743 970 90


Recommended miscellaneous


Extension for Touchfree 500 mm - 12 765 970 90





ST 010 202 2710 mm [inches]





Certificates

LGA_29120. WRAS_1906116. IAPMO_EGS. CE000001_eSet_Tou CE000002_eSet_Tou


chfree_20171206_D chfree_20171206_E E_signed. N_signed.

LGA_29119.





ST 010 202 2710

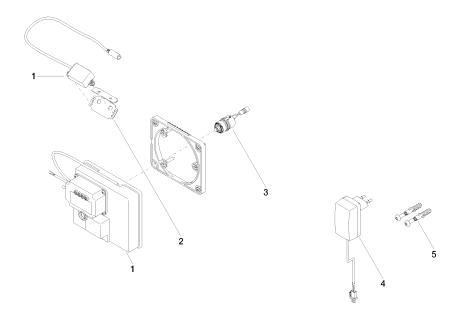

Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
04 30 50 079 00 90	valve	1	2
04 10 01 050 00 90	power supply	1	60
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 04 30 50 079 00 90 04 10 01 050 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 04 30 50 079 00 90 valve 04 10 01 050 00 90 power supply	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 04 30 50 079 00 90 valve 1 04 10 01 050 00 90 power supply 1



LULU

ST 010 202 2710



- 200mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter 40 mm
- 1/2" connection
- plug-link mounting
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment

Recommended miscellaneous

Concealed wall elbow -

35 085 970 90



max. recess depth 163 mmmin. recess depth 90 mm



LULU


ST 010 202 2710






ST 010 202 2710 mm [inches]





Flow rate chart




Certificates

WRAS_1906062. LGA_29119.





ST 010 202 2710



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 24 03 108 00 90	nipple set	1	2
2	90 31 11 004 00 90	pin	1	2
3	90 23 01 118 01-00	aerator	1	10