

## Bath spout with pop-up waste and overflow - Brushed Platinum

SERIES-VARIOUS

36 247 970 Product version from 3/13/2017


















- drain Ø 52mm
- max. flow 27.8 l/min at 3 bar flow pressure

**Also suitable for king-size baths.**

**In combination with 35 021 970 90 concealed single-lever mixer, is intrinsically safe under DIN EN 1717. Alternatively, ensure protection with vacuum breaker 35 150 970 90.**

Also suitable for king-size baths.

In combination with 35 021 970 90 concealed single-lever mixer, is intrinsically safe under DIN EN 1717. Alternatively, ensure protection with vacuum breaker 35 150 970 90.

|   |                                |               |
|---|--------------------------------|---------------|
|    | Brushed Platinum               | 36 247 970-06 |
|    | Chrome                         | 36 247 970-00 |
|    | Platinum                       | 36 247 970-08 |
|    | Durabronze (23kt Gold)         | 36 247 970-09 |
|    | Dark Chrome                    | 36 247 970-19 |
|    | Light Gold                     | 36 247 970-26 |
|    | Brushed Light Gold             | 36 247 970-27 |
|    | Brushed Durabronze (23kt Gold) | 36 247 970-28 |
|    | Matte Black                    | 36 247 970-33 |
|   | Brushed Dark Brass             | 36 247 970-39 |
|  | Brushed Bronze                 | 36 247 970-42 |
|  | Brushed Champagne (22kt Gold)  | 36 247 970-46 |
|  | Champagne (22kt Gold)          | 36 247 970-47 |
|  | Brushed Chrome                 | 36 247 970-93 |
|  | Brushed Dark Platinum          | 36 247 970-99 |

### Required miscellaneous



**Bath spout with pop-up waste and overflow -** 35 248 970 90  
 •bowden cable length 725 mm

### Required miscellaneous





**Vacuum breaker - Brushed Platinum** 36 150 970-06

### Required miscellaneous



**Vacuum breaker -** 35 150 970 90  
 •3/4" connection

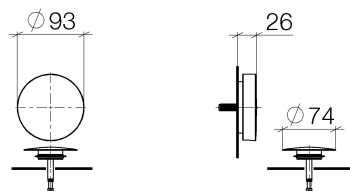

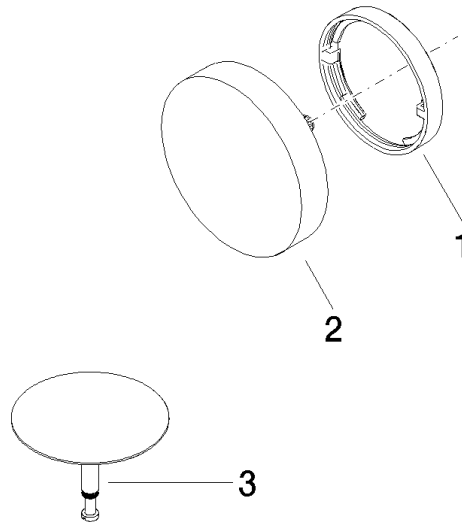

## Spare parts list

| No. | Item Number        | Name   | Quantity used | Delivery time |
|-----|--------------------|--------|---------------|---------------|
| 2   | 90 20 97 061 00-06 | handle | 1.00          | 10            |
| 1   | 09 11 01 124-06    | cover  | 1.00          | 10            |
| 3   | 04 31 20 031 48-06 | plug   | 1.00          | 10            |