

MEM Single-lever basin mixer with pop-up waste - Brushed Champagne (22kt Gold)

MEM

33 500 782 Product version from 5/5/2021



- 165mm projection
- 1 1/4" pop-up waste
- fixed spout
- rectangular, air-enriched flow
- height of mixer 310 mm
- height up to aerator 202 mm
- hole diameter 35 mm
- 2 x pressure hose with 3/8" cap nut
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


Only suitable for basins with an overflow.

	Brushed Champagne (22kt Gold)	33 500 782-46 0010
	Chrome	33 500 782-00 0010
	Brushed Platinum	33 500 782-06 0010
	Platinum	33 500 782-08 0010
	Dark Chrome	33 500 782-19 0010
	Brushed Durabronze (23kt Gold)	33 500 782-28 0010
	Champagne (22kt Gold)	33 500 782-47 0010
	Brushed Dark Platinum	33 500 782-99 0010



MEM Single-lever basin mixer with pop-up waste - Brushed Champagne (22kt Gold)

MEM

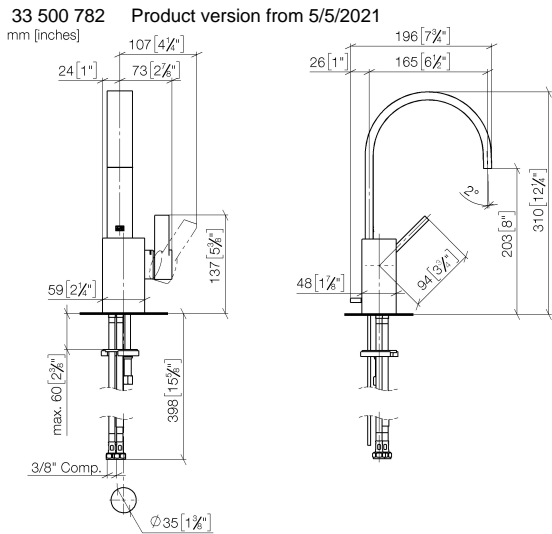

Codes & Standards

ADA	California Energy Commission (CEC)	NSF372	NSF61
-----	------------------------------------	--------	-------

Certificates and sustainability


IAPMO_N-4976 IAPMO_6397

MEM Single-lever basin mixer with pop-up waste - Brushed Champagne (22kt Gold)

MEM

33 500 782 Product version from 5/5/2021

Parts for other
finishes can be found
here: [Chrome](#)

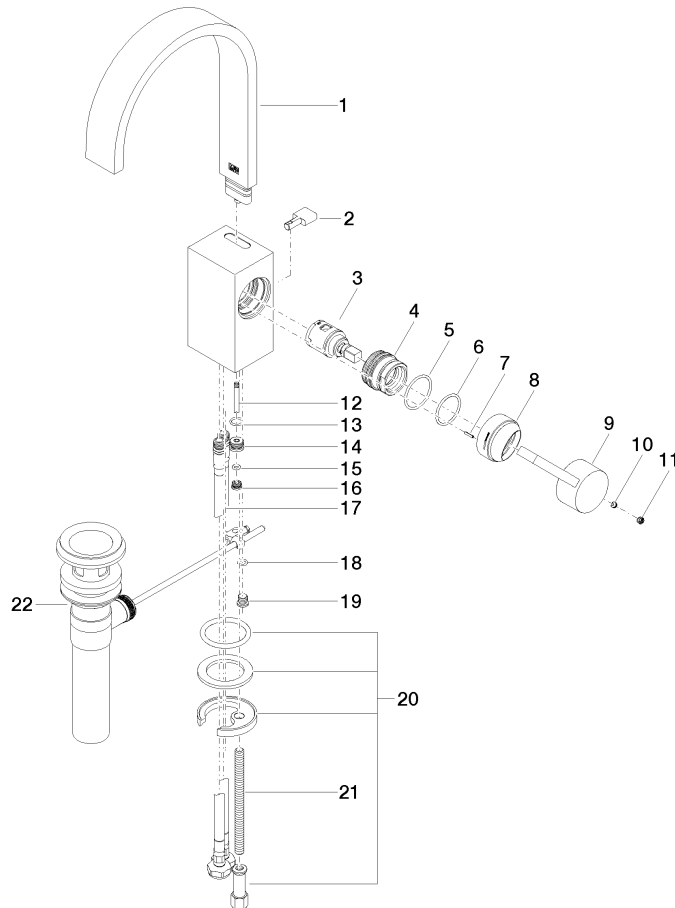



MEM Single-lever basin mixer with pop-up waste - Brushed Champagne (22kt Gold)

MEM

33 500 782 Product version from 5/5/2021

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
14	09 24 04 289-46	nipple	1.00	30
16	09 24 04 290 90	nipple	1.00	2
18	09 14 10 132 90	seal	1.00	2
5	09 14 10 137 90	seal	1.00	2
2	09 20 78 032-46	handle	1.00	60
17	04 30 04 106 00 90	hose	2.00	2
12	09 31 09 080-46	pull-rod	1.00	30
1	90 28 22 153 02-46	spout	1.00	30
9	09 20 78 057-46	handle	1.00	30
13	09 14 10 042 90	seal	1.00	2
15	09 14 10 166 90	seal	1.00	2
21	09 31 11 012 90	pin	1.00	2
19	09 31 20 027 10-00	plug	1.00	10
20	04 30 11 038 75 90	fixing set	1.00	2
4	09 24 04 288 90	nut	1.00	2
7	09 31 11 152 90	pin	1.00	2
3	90 15 05 042 00 90	cartridge	1.00	2
8	09 28 30 028-46	cover	1.00	30
11	90 31 20 109 00 90	plug	1.00	2
22	90 11 01 023 00-46	pop-up waste	1.00	30
6	90 14 10 063 00 90	seal	1.00	2
10	90 31 11 063 00 90	pin	1.00	2