


CL.1 Wall-mounted single-lever basin mixer without pop-up waste - Brushed Dark Platinum

36 860 705
Product version from 7/1/2023



- 198mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- hole diameter spout 37 mm
- hole diameter single-lever mixer 57 mm
- rosette 80 x 80 mm
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Dark Platinum	36 860 705-99
	Chrome	36 860 705-00
	Brushed Platinum	36 860 705-06
	Dark Chrome	36 860 705-19
	Brushed Champagne (22kt Gold)	36 860 705-46
	Champagne (22kt Gold)	36 860 705-47

Required miscellaneous



Concealed wall-mounted single-lever mixer mixer on right -

35 816 970 90

•NOTE:Not suitable for concealed installation.Connection by means of angle valves, mounted with screws to back wall.




Concealed wall-mounted single-lever mixer -

35 860 970 90

•max. recess depth mm  
•min. recess depth mm  
•mixer can be placed above, to the left or to the right of the spout.

## CL.1 Wall-mounted single-lever basin mixer without pop-up waste - Brushed Dark Platinum

36 860 705 Product version from 7/1/2023  
mm [inches]

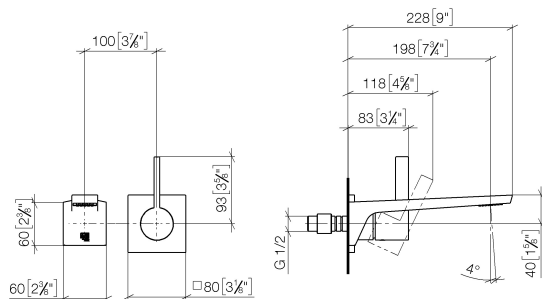

Flow rate chart



### Codes & Standards

ASME A112.18.1	cUPC	DIN 4109	EN 817
----------------	------	----------	--------

EPA WaterSense	ISO 3822	NSF372	NSF61
----------------	----------	--------	-------

Ü-Zeichen

WaterSense





CL.1 Wall-mounted single-lever basin mixer without pop-up waste - Brushed  
Dark Platinum


36 860 705    Product version from 7/1/2023

Certificates

IAPMO_N-4976	DVGW_DW- 6512DN0	IAPMO_6397	LGA_29	IAPMO_8834
IAPMO_4976 (				

## CL.1 Wall-mounted single-lever basin mixer without pop-up waste - Brushed Dark Platinum

36 860 705 Product version from 7/1/2023

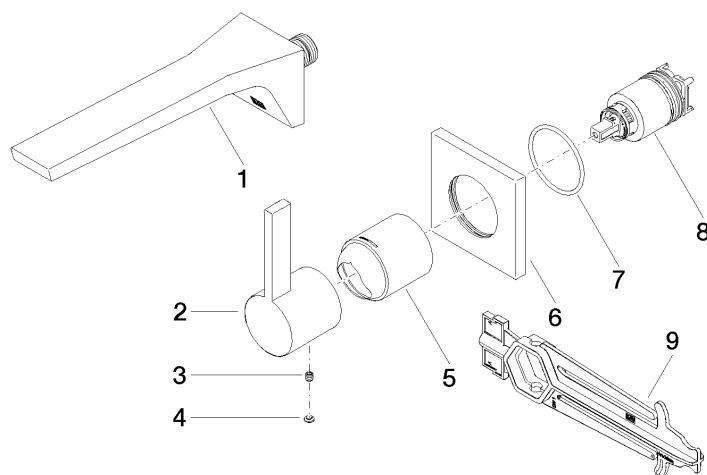

### Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	13 800 705-99	CL.1 Wall-mounted basin spout without pop-up waste - Brushed Dark Platinum	1	20
2	09 20 70 050-99	handle	1	20
3	90 31 11 030 00 90	pin	1	2
4	90 31 20 087 00-99	plug	1	20
5	09 11 02 288-99	cover	1	20
6	09 27 78 039-99	rosette	1	20
7	90 14 10 049 00 90	seal	1	2
8	90 15 05 064 01 90	cartridge	1	2
9	90 30 09 064 00 90	key	1	2