













META Wall-mounted single-lever basin mixer without pop-up waste - Brushed Champagne (22kt Gold)


META

36 805 661	Product version from 4/1/2024		
	<ul style="list-style-type: none"> 160mm projection fixed spout circular, air-enriched flow hole diameter 60 mm rosette Ø 78 mm max. spout flow rate 5.7 l/min with single-point mounting 	 Brushed Champagne (22kt Gold)	36 805 661-46
		 Chrome	36 805 661-00
		 Brushed Platinum	36 805 661-06
		 Dark Chrome	36 805 661-19
		 Light Gold	36 805 661-26
		 Brushed Light Gold	36 805 661-27
		 Matte Black	36 805 661-33
		 Brushed Bronze	36 805 661-42
		 Champagne (22kt Gold)	36 805 661-47
		 Brushed Chrome	36 805 661-93
		 Brushed Dark Platinum	36 805 661-99

Required miscellaneous

 Concealed wall mounting - <ul style="list-style-type: none"> min. recess depth 80 mm max. recess depth 105 mm 	35 050 970 90
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

36 805 661 Product version from 4/1/2024

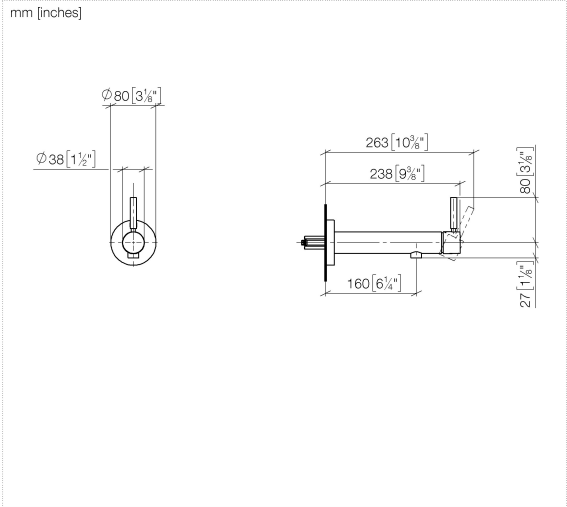

Flow rate chart



Codes & Standards

DIN 4109 ISO 3822 Ü-Zeichen



META Wall-mounted single-lever basin mixer without pop-up waste - Brushed Champagne (22kt Gold)

META

36 805 661 Product version from 4/1/2024

Certificates and sustainability

LGA_38

META Wall-mounted single-lever basin mixer without pop-up waste - Brushed Champagne (22kt Gold)

META

36 805 661 Product version from 4/1/2024



Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
7	09 14 10 120 90	seal	1.00	2
9	90 20 66 024 00-46	handle	1.00	30
1	90 30 11 232 00 90	disc	1.00	2
8	09 28 30 043-46	cover	1.00	60
11	90 30 30 229 00 90	screw	2.00	2
10	90 23 01 168 00-46	aerator	1.00	30
5	90 15 05 044 00 90	cartridge	1.00	2
2	90 24 01 046 01 90	connection	2.00	2
4	09 31 11 144 90	pin	1.00	2
3	90 27 66 026 00-46	rosette	1.00	30
6	09 24 04 266 90	nut	1.00	2