

IMO Single-lever basin mixer with pop-up waste - Brushed Durabronz (23kt Gold)







IMO

33 507 670



- 105mm projection
- 1 1/4" pop-up waste
- fixed spout
- rectangular, air-enriched flow
- height of mixer 149 mm
- height up to aerator 80 mm
- hole diameter 35 mm
- rosette Ø 52 mm optional
- progressive cartridge
- 2 x pressure hose with 3/8" cap nut
- max. flow 4.5 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

Only suitable for basins with an overflow.


	Brushed Durabronz (23kt Gold)	33 507 670-28 0010
	Chrome	33 507 670-00 0010
	Brushed Platinum	33 507 670-06 0010
	Platinum	33 507 670-08 0010
	Brushed Chrome	33 507 670-93 0010
	Brushed Dark Platinum	33 507 670-99 0010




IMO Single-lever basin mixer with pop-up waste - Brushed Durabron (23kt Gold)

IMO

33 507 670
mm [inches]

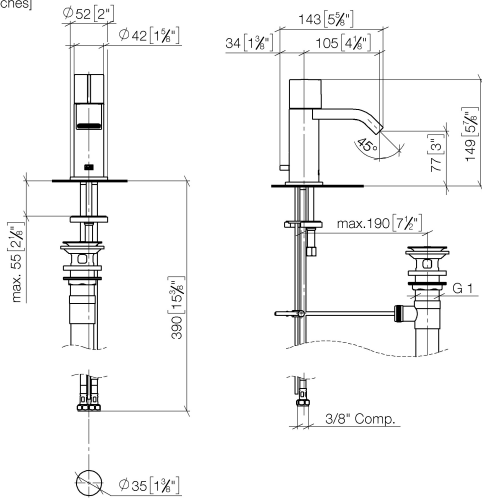

Flow rate chart

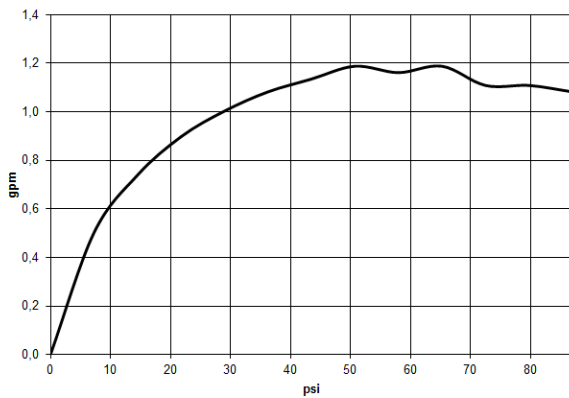

Codes & Standards

ASME
A112.18.1/CSA
B125.1

California Energy
Commission
(CEC)

NSF/ANSI 372

NSF/ANSI/CAN
61



IMO Single-lever basin mixer with pop-up waste - Brushed Durabronze (23kt Gold)


IMO

33 507 670

Certificates

IAPMO_N-4976 (1). IAPMO_6397 (1).

33 507 670
Parts for other finishes can be found here: Chrome

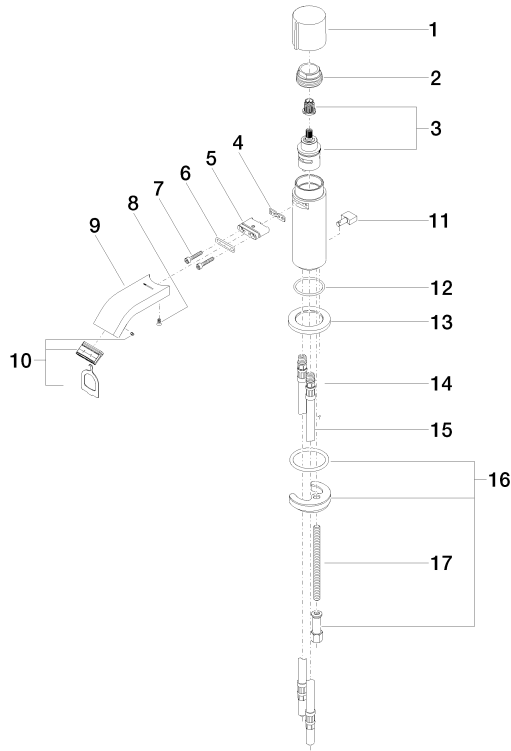

18 4816/ger/for 04.11.01.023.00-8

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 20 67 001-28	handle	1	20
2	09 23 10 065-28	nut	1	-
Spare part can no longer be ordered, please order the replacement item				
3	90 90 03 162 00 90	top	1	2
4	09 14 03 131 90	seal	1	2
5	09 11 03 061 90	connection	1	2
6	09 14 10 053 90	seal	1	2
7	09 30 30 182 90	screw	2	2
8	09 30 30 116 90	screw	1	2
9	09 28 22 238-28	spout	1	20
10	90 29 03 118 00 90	aerator	1	2
11	09 20 67 002-28	handle	1	20
12	09 14 10 104 90	seal	1	2
13	09 27 67 003-28	rosette	1	20
14	09 31 09 080-28	pull-rod	1	20
15	04 30 04 045 00 90	hose	2	60
16	04 30 11 038 00 90	fixing set	1	2
17	09 31 11 012 90	pin	1	2
18	90 11 01 023 00-28	pop-up waste	1	20