

META Wall-mounted single-lever basin mixer without pop-up waste - Brushed Platinum

META

36 861 660 Product version from 7/1/2023



- 250mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter spout 37 mm
- hole diameter single-lever mixer 57 mm
- rosette for spout Ø 60mm
- rosette for mixer Ø 78mm
- max. flow 5.7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS

	Brushed Platinum	36 861 660-06
	Chrome	36 861 660-00
	Dark Chrome	36 861 660-19
	Light Gold	36 861 660-26
	Brushed Light Gold	36 861 660-27
	Matte Black	36 861 660-33
	Brushed Bronze	36 861 660-42
	Brushed Champagne (22kt Gold)	36 861 660-46
	Champagne (22kt Gold)	36 861 660-47
	Brushed Chrome	36 861 660-93
	Brushed Dark Platinum	36 861 660-99

Required miscellaneous



- Concealed wall-mounted single-lever mixer -** 35 860 970 90
- max. recess depth 95 mm
 - min. recess depth 80 mm
 - mixer can be placed above, to the left or to the right of the spout.

Required miscellaneous




- Concealed wall-mounted single-lever mixer mixer on right -** 35 816 970 90
- NOTE: Not suitable for concealed installation. Connection by means of angle valves, mounted with screws to back wall.

META Wall-mounted single-lever basin mixer without pop-up waste - Brushed Platinum

META

36 861 660 Product version from 7/1/2023
mm [inches]

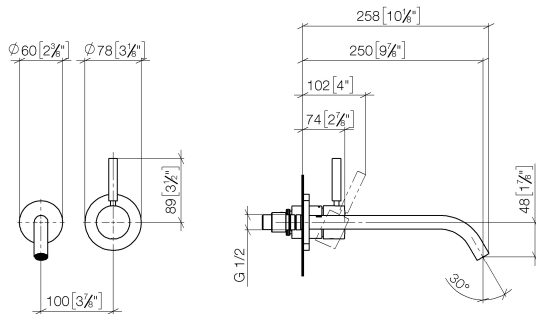

Flow rate chart



Trajectory diagram



Codes & Standards

DIN 4109

EN 817

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen




META Wall-mounted single-lever basin mixer without pop-up waste - Brushed
Platinum

META

36 861 660 Product version from 7/1/2023

Certificates and sustainability

DVGW_DW- 6512DN0	WRAS_2107	LGA_29
---------------------	-----------	--------

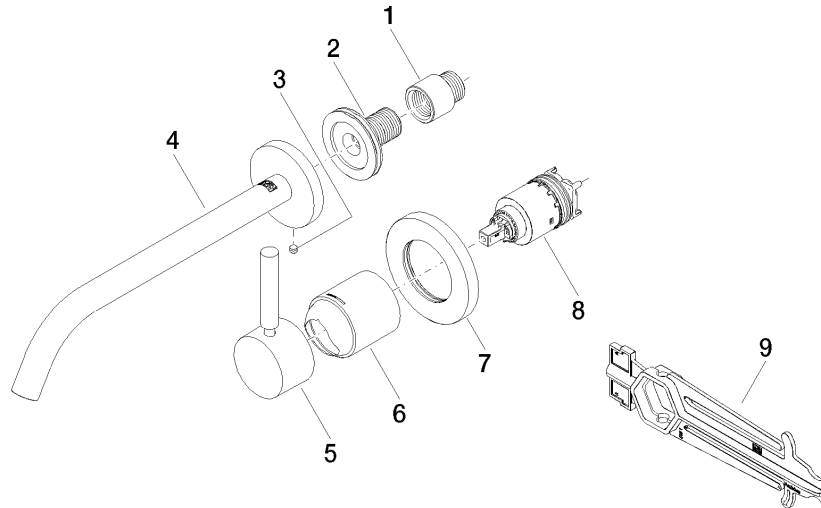

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
6	09 11 02 288-06	cover	1.00	10
5	90 20 66 007 00-06	handle	1.00	10
2	90 24 03 280 00 90	nipple	1.00	2
4	90 28 22 324 00-06	spout	1.00	10
3	09 31 11 112 90	pin	1.00	60
7	90 27 62 011 00-06	rosette	1.00	10
8	90 15 05 064 01 90	cartridge	1.00	2
1	09 24 03 072 10 90	nipple	1.00	2
9	90 30 09 064 00 90	key	1.00	2