

## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Chrome

28 044 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- min. recess depth 137 mm
- with anti-scale system

### Ceiling module power supply

- 12V DC (CV)

### Spot lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

### Ambient lighting

- LED coloured light RGBW
- Bulbs protected against splashing water

### Activation

- ZigBee Light Link RGBW controller
- Provided by customer: Zigbee gateway

### Environment

- Not suitable for outdoor use.
- Not suitable for use in a steam room.
- Not suitable for use in chlorinated or salty environments.
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).
- Dornbracht recommends consulting a systems integrator.
- WRAS

**includes light bulbs with a Class G energy efficiency**

includes light bulbs with a Class G energy efficiency

	Brushed Chrome	28 044 980-93
	Chrome	28 044 980-00
	Brushed Platinum	28 044 980-06
	Platinum	28 044 980-08
	Dark Chrome	28 044 980-19
	Brushed Light Gold	28 044 980-27
	Brushed Durabronze (23kt Gold)	28 044 980-28
	Matte Black	28 044 980-33
	Brushed Champagne (22kt Gold)	28 044 980-46
	Champagne (22kt Gold)	28 044 980-47
	Brushed Dark Platinum	28 044 980-99

## Required miscellaneous




### Concealed ceiling installation box 35 044 970 90 for recessed ceiling installation with light -

- flush-mounted installation box 360x300 mm RAL 9003 signal white
- recess depth mm
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 12V DC SELV / Class 2
- ZigBee Light Link RGBW controller

**Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Chrome**

28 044 980 Product version from 5/1/2022  
mm [inches]

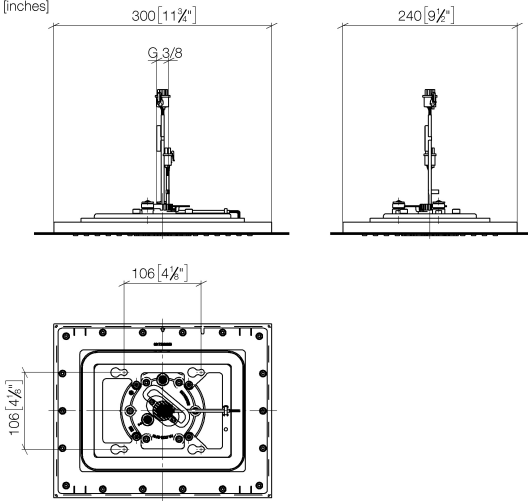

**Flow rate chart**



**Codes & Standards**

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

**Ü-Zeichen**



## Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Chrome

---

28 044 980 Product version from 5/1/2022

### Certificates


---

LGA\_38

WRAS\_240502

Rain shower for recessed ceiling installation with light 300 x 240 mm - Brushed Chrome

28 044 980
Product version from 5/1/2022

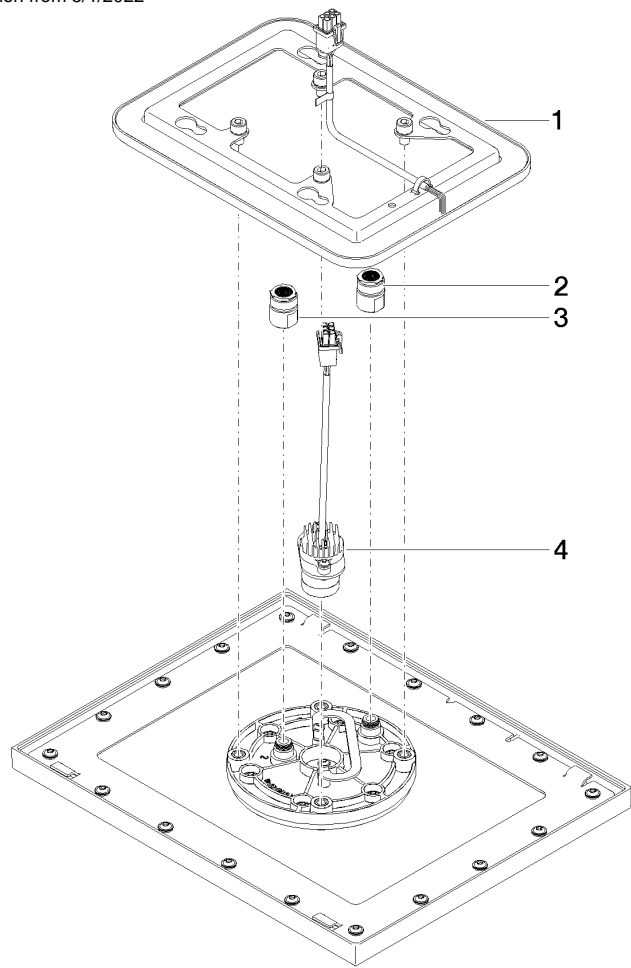

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 10 01 224 00 90	electronic accessories	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2