

LULU Wall-mounted single-lever basin mixer without pop-up waste - Chrome

LULU

36 860 710



- 200mm projection
- fixed spout
- circular, air-enriched flow
- hole diameter spout 37 mm
- hole diameter single-lever mixer 57 mm
- rosette 78 x 78 mm
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
- WRAS



Chrome

36 860 710-00



Brushed Platinum

36 860 710-06

Required miscellaneous



Concealed wall-mounted single-lever mixer -

35 860 970 90

- max. recess depth 95 mm
- min. recess depth 80 mm
- mixer can be placed above, to the left or to the right of the spout.

Required miscellaneous




Concealed wall-mounted single-lever mixer mixer on right -

35 816 970 90

- NOTE: Not suitable for concealed installation. Connection by means of angle valves, mounted with screws to back wall.

36 860 710

mm [inches]

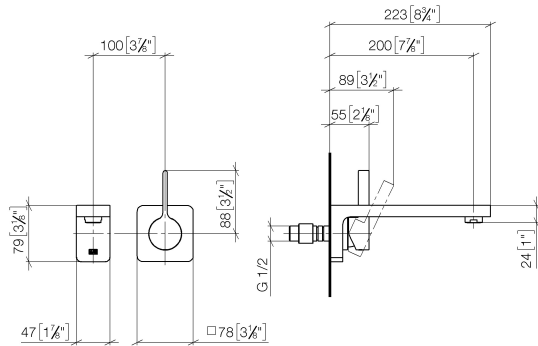

Flow rate chart



Codes & Standards

DIN 4109

EN 817

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



LULU Wall-mounted single-lever basin mixer without pop-up waste - Chrome

LULU

36 860 710

Certificates and sustainability

| | | |
|-----------|---------------------|--------|
| WRAS_2107 | DVGW_DW- 6512DN0 | LGA_29 |
|-----------|---------------------|--------|

36 860 710



Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|-----------------------|------------|---------------|---------------|
| | 9 09 11 02 530-00 | cover | 1.00 | 10 |
| | 13 90 15 05 064 01 90 | cartridge | 1.00 | 2 |
| | 6 09 20 71 001-00 | handle | 1.00 | 10 |
| | 5 90 23 01 118 01-00 | aerator | 1.00 | 10 |
| | 1 09 24 03 072 10 90 | nipple | 1.00 | 2 |
| | 4 09 11 71 090 10-00 | spout | 1.00 | 10 |
| | 10 09 27 71 001-00 | rosette | 1.00 | 10 |
| | 12 09 24 04 105 90 | nut | 1.00 | 2 |
| | 2 90 24 03 108 00 90 | nipple set | 1.00 | 2 |
| | 8 90 31 20 109 00 90 | plug | 1.00 | 2 |
| | 14 90 30 09 064 00 90 | key | 1.00 | 2 |
| | 3 90 31 11 004 00 90 | pin | 1.00 | 2 |
| | 7 90 31 11 030 00 90 | pin | 1.00 | 2 |
| | 11 90 14 10 049 00 90 | seal | 1.00 | 2 |