

## Rain shower for surface-mounted ceiling installation 300 mm - Brushed Dark Brass

SERIES SPECIFIC















28 031 970 Product version from 5/1/2022



- rain shower Ø 300 mm
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

### Technical data:


- Distance to ceiling from bottom edge of shower 40 mm
- For simultaneous control of the jet types, we recommend the xTool thermostat module
- WRAS

	Brushed Dark Brass	28 031 970-39
	Chrome	28 031 970-00
	Brushed Platinum	28 031 970-06
	Platinum	28 031 970-08
	Dark Chrome	28 031 970-19
	Light Gold	28 031 970-26
	Brushed Light Gold	28 031 970-27
	Brushed Durabrass (23kt Gold)	28 031 970-28
	Matte Black	28 031 970-33
	Brushed Bronze	28 031 970-42
	Brushed Champagne (22kt Gold)	28 031 970-46
	Champagne (22kt Gold)	28 031 970-47
	Brushed Chrome	28 031 970-93
	Brushed Dark Platinum	28 031 970-99

# Rain shower for surface-mounted ceiling installation 300 mm - Brushed Dark Brass

SERIES SPECIFIC

28 031 970 Product version from 5/1/2022  
mm [inches]

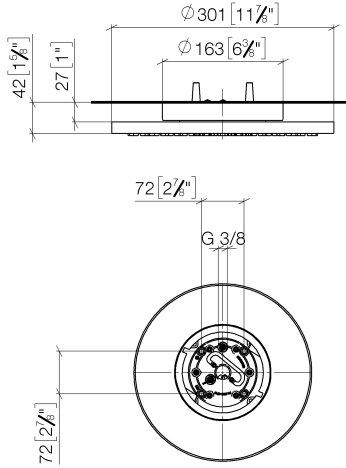

## Flow rate chart



## Codes & Standards

DIN 4109

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation 300 mm - Brushed Dark  
Brass

SERIES SPECIFIC

28 031 970    Product version from 5/1/2022

Certificates and sustainability

LGA\_38


WRAS\_240502

Rain shower for surface-mounted ceiling installation 300 mm - Brushed Dark Brass

SERIES SPECIFIC

28 031 970
Product version from 5/1/2022

Parts for other finishes can be found here: Chrome

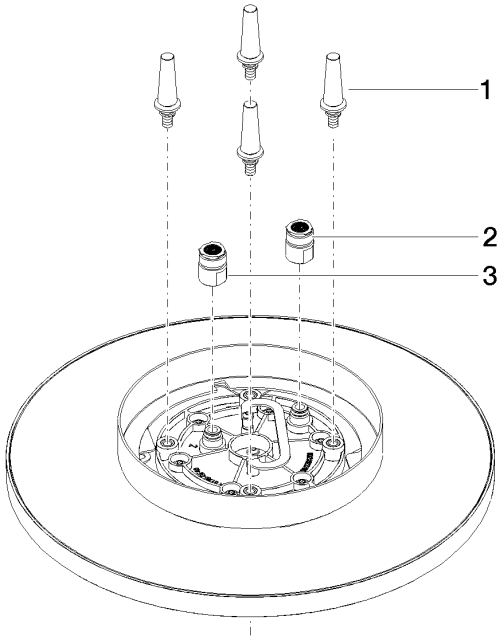

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2
1	90 17 20 263 00 90	fixing set	1.00	2