

















WATER FALL Cascade spout with individual jets for wall mounting - Brushed Platinum


SERIES-VARIOUS

13 425 979 Product version from 10/1/2023			
	<ul style="list-style-type: none"> PEARLSTREAM Max. flow rate 9.5 l/min (at 3 bar) Function from: l/min 		
	Technical data: <ul style="list-style-type: none"> plate 240 mm x 60 mm 22mm projection connection 1/2", for shortening plug-link mounting 		
			Brushed Platinum 13 425 979-06
			Chrome 13 425 979-00
			Platinum 13 425 979-08
			Dark Chrome 13 425 979-19
			Light Gold 13 425 979-26
			Brushed Light Gold 13 425 979-27
			Brushed Durabronze (23kt Gold) 13 425 979-28
			Matte Black 13 425 979-33
			Brushed Dark Brass 13 425 979-39
			Brushed Bronze 13 425 979-42
			Brushed Champagne (22kt Gold) 13 425 979-46
			Champagne (22kt Gold) 13 425 979-47
			Brushed Chrome 13 425 979-93
			Brushed Dark Platinum 13 425 979-99

Recommended miscellaneous

		35 085 970 90
	Concealed wall elbow - <ul style="list-style-type: none"> max. recess depth 163 mm min. recess depth 90 mm 	


Recommended miscellaneous

		35 085 970 90
	Concealed wall elbow - <ul style="list-style-type: none"> max. recess depth 163 mm min. recess depth 90 mm 	


WATER FALL Cascade spout with individual jets for wall mounting - Brushed Platinum

SERIES-VARIOUS

13 425 979 Product version from 10/1/2023
mm [inches]

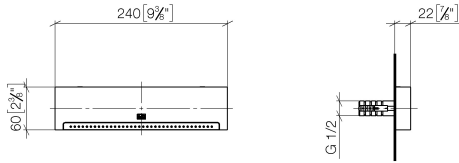

Flow rate chart

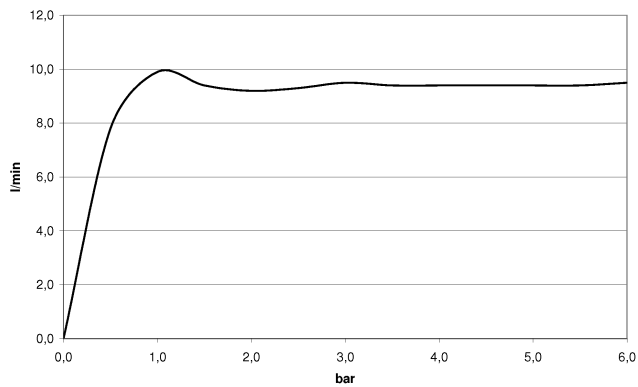

Trajectory diagram



Codes & Standards

ASME A112.18.1

cUPC

DIN 4109

ISO 3822

Ü-Zeichen



WATER FALL Cascade spout with individual jets for wall mounting - Brushed Platinum


SERIES-VARIOUS

13 425 979 Product version from 10/1/2023

Certificates and sustainability

LGA_19

IAPMO_4976

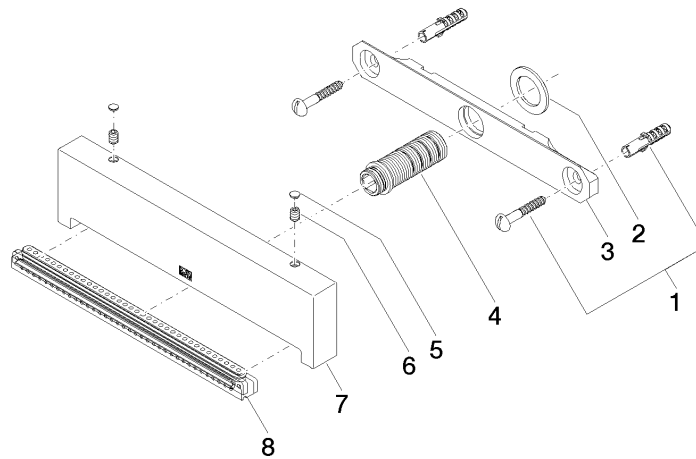

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
6	09 31 11 144 90	pin	2.00	2
1	04 30 31 024 01 90	fixing set	1.00	2
8	90 29 03 071 00 90	insert	1.00	2
2	09 14 05 009 90	seal	1.00	2
3	09 17 97 053 90	holder	1.00	2
5	90 31 20 087 00-06	plug	1.00	10
4	90 24 03 199 00 90	connection	1.00	2