

Rain shower , ceiling-mounted 11-3/4" x 9-1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC

28 041 980    Product version from 5/1/2022



- 11-3/4" x 9-1/2" Rain showerhead
- Rain panel with 2 different spray modes
- PURE RAIN, flow rate max. 1.8 gpm (at 3 bar)
- PURIFY RAIN, flow rate max. 1.6 gpm (at 3 bar)
- Descaling system

**Technical data:**

- Distance between ceiling and bottom of showerhead 1-5/8"

**Planning tips:**

- For simultaneous control of the jet types, we recommend the xTool thermostat module
- Not suitable for use in a steam room.

**To meet the North American plumbing standards, this application must be installed with a diverter (35 203 970-900010, 3-way diverter rough included and required for more restricted states).**

To meet the North American plumbing standards, this application must be installed with a diverter (35 203 970-900010, 3-way diverter rough included and required for more restricted states).

	Brushed Champagne (22kt Gold)	28 041 980-46 0010
	Chrome	28 041 980-00 0010
	Brushed Platinum	28 041 980-06 0010
	Platinum	28 041 980-08 0010
	Dark Chrome	28 041 980-19 0010
	Brushed Light Gold	28 041 980-27 0010
	Brushed Durabrass (23kt Gold)	28 041 980-28 0010
	Matte Black	28 041 980-33 0010
	Champagne (22kt Gold)	28 041 980-47 0010
	Brushed Chrome	28 041 980-93 0010
	Brushed Dark Platinum	28 041 980-99 0010

Required article

	<b>Installation rough , ceiling-mounted -</b>	35 041 970-90 0010
	<ul style="list-style-type: none"> <li>•Min. rough in depth 3-1/2"</li> <li>•Pre-assembly kit for three-way diverter included</li> <li>•Max. rough in depth 4-1/2"</li> </ul>	





Rain shower , ceiling-mounted 11-3/4" x 9-1/2" - Brushed Champagne (22kt Gold)

SERIES SPECIFIC


28 041 980    Product version from 5/1/2022

mm [inches]

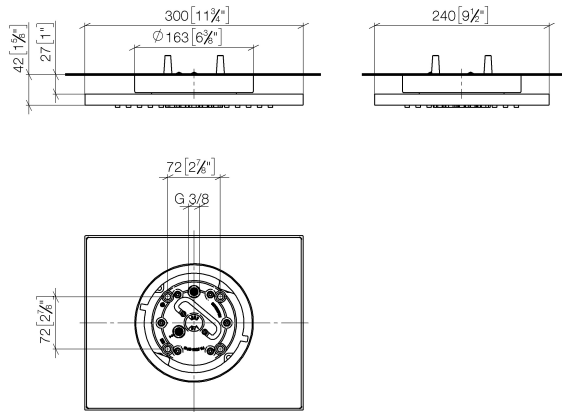

Codes & Standards			
ASME A112.18.1	California Energy Commission (CEC)	cUPC	EPA WaterSense
WaterSense			

Certificates and sustainability	
IAPMO_4976	IAPMO_11777

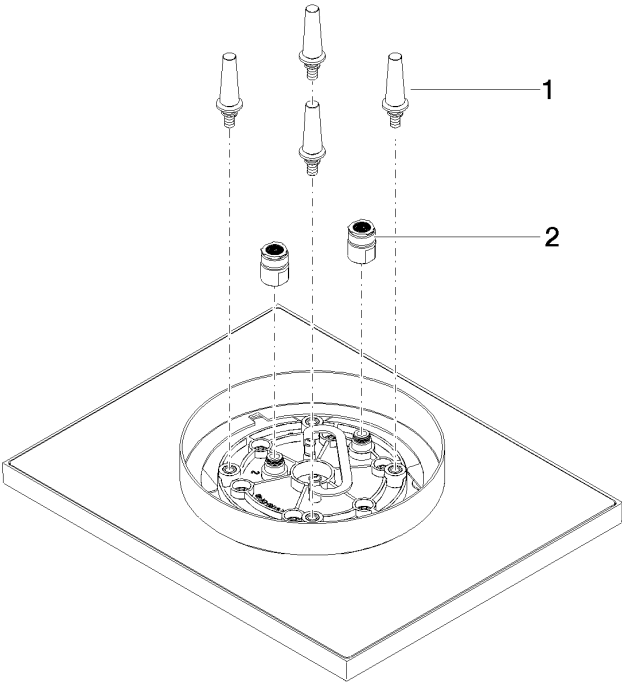

Spare parts list

Number	Item Number	Designation	Number of units	Lead time
1	90 17 20 263 00 90	fixing set	1.00	2
2	90 24 03 309 02 90	connection	2.00	2