



ST 010 105 7882



Fits: TARA, META

- 166mm projection
- pivotable spout 360°
- circular, air-enriched flow
- height of mixer 285 mm
- height up to aerator 163 mm
- rosette Ø 60 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free
- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 Cannot be combined with basins in conducting

Cannot be combined with basins in conductin materials (e.g. steel. river stone).
Cannot be combined with basins that have a

closing drain.
ATTENTION: Separate terms and conditions for electronic articles are applicable.

Individual components of this set

You need the following components for this set



1x

42 765 970 90



1x

13 716 882-00



eSET Touchfree Basin mixer without pop-up waste with temperature setting - $\operatorname{\mathsf{Chrome}}$

TARA

ST 010 105 7882





ST 010 105 7882



Fits: IMO, LULU, MADISON, MEM, TARA, CL.1, LISSÉ, VAIA, META, CYO

- automatic hygiene flush
- suitable for thermal disinfection
- adjustable follow-up time
- high-frequency sensors with self-calibration
- magnetic valve
- temperature setting via thermostat
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
 • WRAS 1906116

Cannot be combined with basins in conducting materials (e.g. steel. river stone).
Cannot be combined with basins that have a closing drain.

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Cannot be combined with basins in conducting materials (e.g. steel. river stone).

Cannot be combined with basins that have a closing

ATTENTION: Separate terms and conditions for electronic articles are applicable.

Required miscellaneous



eSET Touchfree Basin mixer with temperature setting for combining with free-standing fittings -

35 740 970 90

Required miscellaneous



eSET Touchfree Basin mixer with 35 741 970 90 temperature setting for combining with wall-mounted fittings -

•max. recess depth 125 mm •min. recess depth 90 mm


Recommended miscellaneous


Extension for Touchfree 500 mm - 12 765 970 90





ST 010 105 7882 mm [inches]





Certificates

LGA_29120. WRAS_1906116. IAPMO_EGS. CE000001_eSet_Tou CE000002_eSet_Tou


chfree_20171206_D chfree_20171206_E E_signed. N_signed.

LGA_29119.





ST 010 105 7882

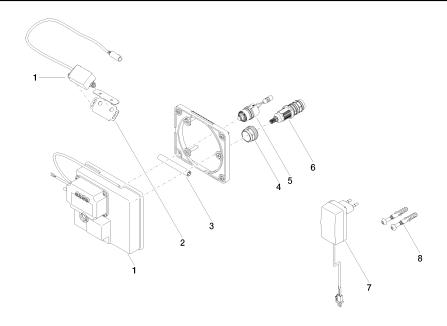

Spare parts list

Item Number	Name	Quantity used	Delivery time
90 10 01 177 00 90	electronic accessories	1	2
90 17 20 199 00 90	holder	1	2
90 23 01 124 00 90	sleeve	1	2
09 23 10 129 90	nut	1	2
04 30 50 079 00 90	valve	1	2
90 15 02 013 00 90	cartridge	1	2
04 10 01 246 00 90	electronic accessories	1	2
04 30 31 024 01 90	fixing set	1	2
	90 10 01 177 00 90 90 17 20 199 00 90 90 23 01 124 00 90 09 23 10 129 90 04 30 50 079 00 90 90 15 02 013 00 90 04 10 01 246 00 90	90 10 01 177 00 90 electronic accessories 90 17 20 199 00 90 holder 90 23 01 124 00 90 sleeve 09 23 10 129 90 nut 04 30 50 079 00 90 valve 90 15 02 013 00 90 cartridge 04 10 01 246 00 90 electronic accessories	90 10 01 177 00 90 electronic accessories 1 90 17 20 199 00 90 holder 1 90 23 01 124 00 90 sleeve 1 09 23 10 129 90 nut 1 04 30 50 079 00 90 valve 1 90 15 02 013 00 90 cartridge 1 04 10 01 246 00 90 electronic accessories 1





ST 010 105 7882



Fits: TARA, META

- 166mm projection
- pivotable spout 360°
- circular, air-enriched flow
- height of mixer 285 mm
- height up to aerator 163 mm
- hole diameter 35 mm
- rosette Ø 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free
- This product can help a building meet the requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB
 WRAS 1909064

For Touchfree control please order eSet Touchfree WITH or WITHOUT temperature adjustment




eSET Touchfree Basin mixer without pop-up waste with temperature setting - $\operatorname{\mathsf{Chrome}}$

TARA


ST 010 105 7882







Flow rate chart



Certificates


LGA_29120.

WRAS_1909064.

GDV_0400289.



ST 010 105 7882

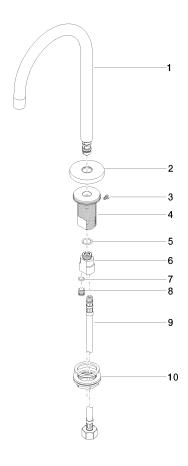

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 28 22 319 00-00	spout	1	10
2	09 27 89 114-00	rosette	1	10
3	09 30 30 037 90	screw	1	2
4	09 30 22 027 90	connection	1	60
5	09 14 10 130 90	seal	1	2
6	09 11 10 055 10 90	connection	1	2
7	90 14 10 060 00 90	seal	1	2
8	09 31 20 065 90	plug	1	2
9	04 30 04 019 00 90	hose	1	2
10	04 23 10 009 01 90	fixing set	1	2